

Estimation of peak ground acceleration and spectral acceleration for South India with local site effects: probabilistic approach

K. S. Vipin, P. Anbazhagan, and T. G. Sitharam

Department of Civil Engineering, Indian Institute of Science, Bangalore-560012, India

Received: 11 August 2008 – Revised: 7 April 2009 – Accepted: 25 May 2009 – Published: 16 June 2009

Abstract. In this work an attempt has been made to evaluate the seismic hazard of South India (8.0° N– 20° N; 72° E– 88° E) based on the probabilistic seismic hazard analysis (PSHA). The earthquake data obtained from different sources were declustered to remove the dependent events. A total of 598 earthquakes of moment magnitude 4 and above were obtained from the study area after declustering, and were considered for further hazard analysis. The seismotectonic map of the study area was prepared by considering the faults, lineaments and the shear zones in the study area which are associated with earthquakes of magnitude 4 and above. For assessing the seismic hazard, the study area was divided into small grids of size $0.1^{\circ} \times 0.1^{\circ}$, and the hazard parameters were calculated at the centre of each of these grid cells by considering all the seismic sources within a radius of 300 km. Rock level peak horizontal acceleration (PHA) and spectral acceleration (SA) values at 1 s corresponding to 10% and 2% probability of exceedance in 50 years have been calculated for all the grid points. The contour maps showing the spatial variation of these values are presented here. Uniform hazard response spectrum (UHRS) at rock level for 5% damping and 10% and 2% probability of exceedance in 50 years were also developed for all the grid points. The peak ground acceleration (PGA) at surface level was calculated for the entire South India for four different site classes. These values can be used to find the PGA values at any site in South India based on site class at that location. Thus, this method can be viewed as a simplified method to evaluate the PGA values at any site in the study area.

considered as seismically stable. A recent study by Kumar et al. (2007) indicate a lithospheric thickness of 80–100 km for Indian plate. This lithospheric depth is very small when compared to the depth of lithosphere below other continental masses like Africa, Antarctica and Australia. At present Indian plate is moving with a high velocity (Jade, 2004), which is attributed to the low lithospheric depth as one of the reasons (Kumar et al., 2007). Gangrade and Arora (2000) have also reported that a slow and steady accumulation of seismic energy is occurring in this region which may lead to earthquakes of moderate to significantly high magnitudes. Some of the major earthquakes reported in Peninsular India since 18th Century include Mahabaleshwar (1764), Kutch (1819), Damooh hill (near Jabalpur, 1846), Mount Abu (1848), Coimbatore (1900), Son-Valley (1927), Satpura (1938), Anjar (1956), Koyna (1967), Killari (1993), Jabalpur (1997) and the recent Bhuj earthquake (2001). Mandal et al. (2000) highlighted that during the last four decades stable continental shield region (SCR) of India has experienced moderate seismic activity.

Earthquake hazard is controlled by three factors – source properties, path characteristics, and local site effects. For assessing the seismic hazard the important factors to be considered are: past earthquake data, earthquake source characteristics in the region and the attenuation relationships. Seismic hazard may be analyzed deterministically by considering a particular earthquake scenario, or probabilistically, by considering the uncertainties involved in earthquake size, location, and time of occurrence (Kramer, 1996). In this paper an attempt has been made to estimate seismic hazard at rock level in terms of peak horizontal acceleration (PHA) and spectral acceleration (SA) using probabilistic seismic hazard analysis (PSHA). A new seismotectonic map of the study area has been prepared for this purpose, which consists of the past earthquake data, collected from various sources, and the seismic sources associated with these earthquakes. After declustering the earthquake data, their completeness was analyzed using Stepp's (1972) method and the values of the seismicity parameters, “*a*” and “*b*”, were estimated using

1 Introduction

The Peninsular India is one of the oldest Archaean shield regions in the world, whose continental interiors are generally



Correspondence to: T. G. Sitharam
(sitharam@civil.iisc.ernet.in)

G-R method. Using the seismic hazard parameters and the seismic sources of the region, seismic hazard curves (mean annual rate of exceedance versus PHA (g) and SA (g) for 1 s), rock level response spectrum and contours maps of PHA (g) with 10% and 2% probability of exceedance in 50 years and spectral acceleration corresponding to 1 s and 5% damping with 10% and 2% probability of exceedance in 50 years were prepared.

The peak ground acceleration (PGA) and SA values at ground surface may vary significantly from the values at bed rock level. These variations, either amplification or de-amplification, will depend upon the site conditions. For the evaluation of PGA values, the site characterization has to be done and this will require analysis and study of a large amount of geological, seismological and geotechnical data. The PGA values at the ground surface for the entire study area were evaluated by considering four different site classes viz. site class A to D (BSCC, 2001).

A design response spectrum, which will be extremely useful for designers, has been developed for Mumbai for site class D, based on Eurocode 8 (2005) and IS (BIS-1893, 2002) code recommendation. The comparison of design values obtained are also presented in this paper.

The seismic hazard estimation for Peninsular India was previously attempted by Jaiswal and Sinha (2007) and their study area starts from 10° N. In the present study, the study area selected is from 8° N and the earthquake data and details of seismic sources were collected for an area of about 300 km from the boundary of study area, as per Regulatory Guide 1.165 (1997). Apart from this there are major differences in the methodology adopted for the evaluation of seismic hazard. The previous study adopted a zone less approach and the seismic sources were not identified. However in this work an extensive study was carried out to identify and to map the seismic sources from SEISAT (2000) and from remote sensing images (Ganesha Raj and Nijagunappa, 2004). About 189 active seismic sources, which were associated with earthquakes of moment magnitude 4 and above, were identified in the study area. The earthquake catalogue for this study contains 598 events with moment magnitude 4 and above against 184 events considered by Jaiswal and Sinha (2007). In the current work data until 2006 was considered where as Jaiswal and Sinha (2007) had considered the data till 2002. Moreover the present study used a regional attenuation relationship developed by Iyengar and Raghukanth (2004), whereas, Jaiswal and Sinha (2007) gave 50% weightage to this relationship and the rest to other attenuation relations. The variation of the spectral acceleration at 1 s, with 10% and 2% probability of exceedance in 50 years, for the entire study area is also provided in the present study. The variation of peak horizontal acceleration and spectral acceleration has been evaluated for return periods of 475 years and 2500 years. Site response effects were also considered and the PGA values at ground surface for the entire study area were developed for four different site classes. The site

response study has not been attempted previously for this region. A design response spectrum for Mumbai, based on site class D, has been developed based on Eurocode 8 (2005) and Indian standards code (BIS-1893, 2002).

2 Study area

South India (8.0° N–20° N; 72° E–88° E) is considered as a stable continental shield region with moderate seismicity. The seismic regionalization studies started in 1959 by Tandon (1956) and Krishna (1959) to demarcate areas of potential earthquake damage in the Indian subcontinent. The intensity-based mapping of Indian Subcontinent was presented by Guha (1962) and Gubin (1968). The probabilistic seismic hazard studies for this area was done by several researchers including Basu and Nigam (1977), Kaila and Rao (1979), Khatri et al. (1984) and Jaiswal and Sinha (2006, 2007). Even though researchers like Reddy (2003), Purnachandra Rao (1999), Gangrade and Arora (2000), etc. have highlighted the need for seismic study of southern Peninsular India, no detailed seismic hazard analysis has been done for the entire South India. The area selected in this study is between latitude 8° N–20° N and longitude 72° E–88° E, which is shown as the hatched portion in Fig. 1. Seismic study area covers about 300 km from the boundary of study area, as per Regulatory Guide 1.165 (1997), is also shown in Fig. 1. The study area consists of five states of India, viz. Kerala, Tamil Nadu, Karnataka, Andhra Pradesh, and Goa. The union territory of Pondicherry and some parts of the states of Maharashtra, Orissa and Chhattisgarh also fall in the study area. Total population in South India is about 300 million and there are about eight cities with population exceeding one million in this region. Mumbai, the financial capital of India and the fifth most populous city in the world, alone accounts for a population of 19 million. These facts clearly demonstrate the need to identify the active seismic sources and to assess the seismic hazard in this region considering the local site effects. The study area includes two mountain ranges of Western Ghats and Eastern Ghats and a plateau formed by major rivers like Tungabhadra, Kaveri, Krishna and Godavari. A map showing various geotectonic features of South India (Indian peninsula) like, major fault zones, thrusts, structural trends, granitic intrusions and the various lithotectonic provinces was presented by Valdiya (1973).

3 Seismicity characteristics

According to the seismic zonation map of BIS-1893 (2002), study area falls in zones II and III. Ramalingeswara Rao (2000) has calculated the strain rate for Indian shield region and the values obtained were found to be the second highest for SCR of the world. Seeber et al. (1999) has reported that the between 1960 and 1990 the seismicity of peninsular India showed a three fold increase.

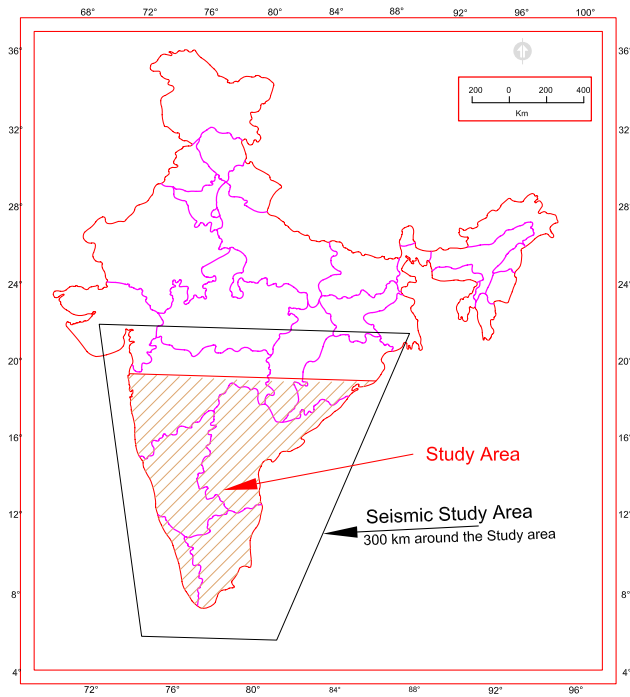


Fig. 1. Study area along with seismic study area.

Estimation of seismic hazard values in any region needs the complete details of past earthquakes with a uniform magnitude scale. The earthquake catalogue for this region was prepared by consolidating the available information from different sources and covers the time period 1820–2006. The earthquake data were collected from different sources like Coast and Geodetic Survey, earthquake-info (2005), Guaribidanur Array, Geological Survey of India, Indian Meteorological Department, International Seismological Centre, International Seismological Summary, Kalpakkam Atomic Reactor, National Geophysical Research Institute, Seismological Observatory, and United States Geological Survey. In addition to this, a few more data were collected from the catalogues published by different researchers like Oldham (1883), Milne (1911), Turner (1911), Gubin (1968), Kelkar (1968), Gosavi et al. (1977) and intensities of the earthquakes as assigned by Srivastava and Ramachandran (1983). The details of data collected from different sources like, duration of data and the magnitude of data are given in Table 1. The data collected were carefully analyzed to remove the duplicate events. In some cases the magnitude for the same event reported by different agencies were slightly different and in those cases we have selected the higher magnitude along with its epicentral co-ordinates in the analysis. The data obtained were in different scales such as body wave magnitude (m_b) surface wave magnitude (M_s), local magnitude (M_L) and the earthquake intensity scale (I). Hence these data were converted to a common scale of moment magnitude (M_w). The local magnitudes were converted

Table 1. Details of earthquake data from different sources.

Source	Period of data	Magnitude range
Kalpakkam	1820–1990	1.6–5.6
NGRI (Hyd)	1968–1981	2.1–5.2
GBA	1968–1995	0.9–5.7
Earthquakeinfo	1843–1997	3.2–5.9
USGS	1841–2006	2.2–6.4
IMD	1827–2006	2.8–6.3
ISC	1967–1994	4.1–6.4

Table 2. Earthquake events with magnitude 6.0 and above in study area.

Date	Latitude (° N)	Longitude (° E)	Depth (km)	Original magnitude	M_w	Reference
26 May 1618	18.9	72.9	6.9	I–IX	7.0	OLD
Aug 1764	17.9	73.7	–	–	6.0	KEL
31 Mar 1852	22.1	77.5	–	–	6.0	Earthquakeinfo
7 Feb 1900	10.8	76.8	70	I–VIII	6.3	BASU
21 Apr 1919	22	72	–	I–VIII	6.3	IMD
14 Mar 1938	21.5	75.7	50	I–VIII	6.3	GR
9 May 1963	21.7	84.9	–	ML–6.0	6.0	IMD
10 Dec 1967	17.5	73.73	10	Ms–6.5	6.4	ISC
13 Apr 1969	17.81	80.67	–	Ms–6.0	6.1	ISC
29 Sep 1993	18.06	77.5	–	M_w –6.2	6.2	USGS

using the equation suggested by Heaton et al. (1986), the body wave and surface wave magnitude were converted using the relations suggested by Scordilis (2006) and the intensity values were converted using the empirical relation ($M=(2/3)I+1$), where I is the earthquake intensity value. A declustering algorithm was used to remove the dependent events from this catalogue. Most of the declustering algorithms are developed for active tectonic conditions; hence it may not be suitable in the present study. Here we have considered a criterion based on uniform time (>30 days) and space (>30 km) window between successive events. After declustering there were 1588 events in the catalogue, out of which 10 events of $M_w \geq 6.0$, 135 events of $M_w \geq 5.0$ and 598 events of $M_w \geq 4.0$. All the events of $M_w \geq 4.0$ were used for further analysis. The information on earthquakes with magnitude greater than or equal to 6.0 is given in Table 2.

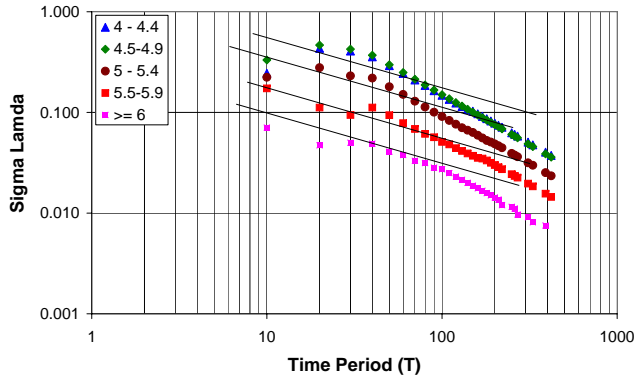


Fig. 2. Completeness analysis using Stepp's method.

4 Regional recurrence relation

The Seismic activity of a region is characterized by the Gutenberg and Richter (1944) earthquake recurrence law. According to this law,

$$\log_{10} N = a - bM \quad (1)$$

Where N is the total number of earthquakes of magnitude M and above in an year and a and b are the seismic parameters of the region. The completeness of the catalogue was evaluated using the Stepp's (1972) method. From the analysis it was found that the magnitude range 4–5 was complete for 70 years, magnitude range of 5–6 was complete for 80 years and magnitudes above 6 were complete for 100 years (Fig. 2). The frequency magnitude relationship obtained from the data for a magnitude interval of 0.1 for the study area is shown in Fig. 3. From this analysis, the earthquake recurrence relation obtained is

$$\log_{10} N = 4.58(\pm 0.4) - 0.891(\pm 0.07)M \quad (2)$$

The hazard parameters are $a=4.58$ and $b=0.891$. The “ b ” value obtained for the study area matches well with the previous studies of Ram and Rathor (1970), Kaila et al. (1972), Ramalingeswara Rao and Sitapathi Rao (1984), Anbazhagan et al. (2009) and Jaiswal and Sinha (2006, 2007).

5 Identification of seismic sources

The seismic sources in the study area were identified from the seismotectonic atlas (SEISAT, 2000), published by the Geological Survey of India. The SEISAT maps are available in A_0 size sheets and each map covers an area of $3^\circ \times 3^\circ$. The study area was covered in 19 sheets of SEISAT. The required pages of SEISAT were scanned and after georeferencing these images, the earthquake data was superimposed on this. The sources, which are associated with earthquake events of magnitude 4 and above, were identified and were

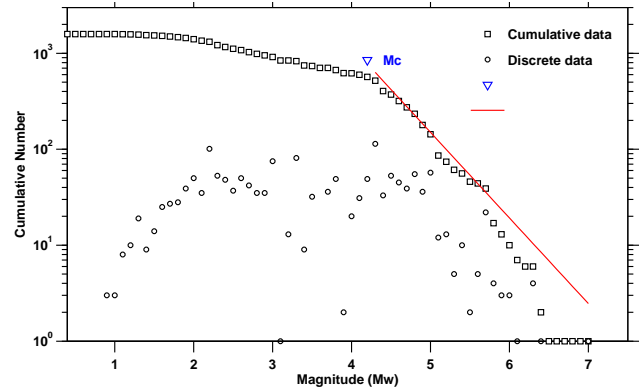


Fig. 3. Frequency magnitude relationship for the study area.

used in the hazard analysis. Apart from this some additional lineaments and faults were obtained from the remote sensing image analysis of Ganesha Raj and Nijagunappa (2004). The seismic study area covers about 300 km from the boundary of study area. The seismotectonic map along with the details of earthquakes is shown in Fig. 4. The details regarding location, length, number of earthquakes of magnitude 4 and above occurred along a source and the maximum reported magnitude were collected for all the sources. A total of 189 seismic sources were identified in the study area, which includes 39 faults, 139 lineaments, 2 ridges and 9 shear zones. The length of seismic sources varied from 3 km to 592 km. The details of the source parameters are given in Table 3.

6 Seismic hazard analysis

Probabilistic seismic hazard analysis (PSHA) was initially developed by Cornell (1968). Many researchers have adopted this methodology for evaluating hazard and recently this method has been adopted by Iyengar and Ghosh (2004), Raghu Kanth and Iyengar (2006) and Anbazhagan et al. (2009) for the probabilistic seismic hazard analysis of Delhi, Mumbai and Bangalore respectively. In the present study also similar methods are used to evaluate the seismic hazard of South India. The hazard curves obtained from PSHA show the variation of peak horizontal acceleration (PHA) or spectral acceleration (SA) against mean annual rate of exceedance. For calculating the seismic hazard values, the entire study area was divided into grids of size $0.1^\circ \times 0.1^\circ$ (about 9500 cells) and the hazard values at the centre of each grid cell were calculated by considering all the seismic sources within a radius of 300 km. For this purpose a new program was developed in MATLAB.

The occurrence of an earthquake in a seismic source is assumed to follow a Poisson's distribution. The probability of ground motion parameter at a given site, Z , will exceed

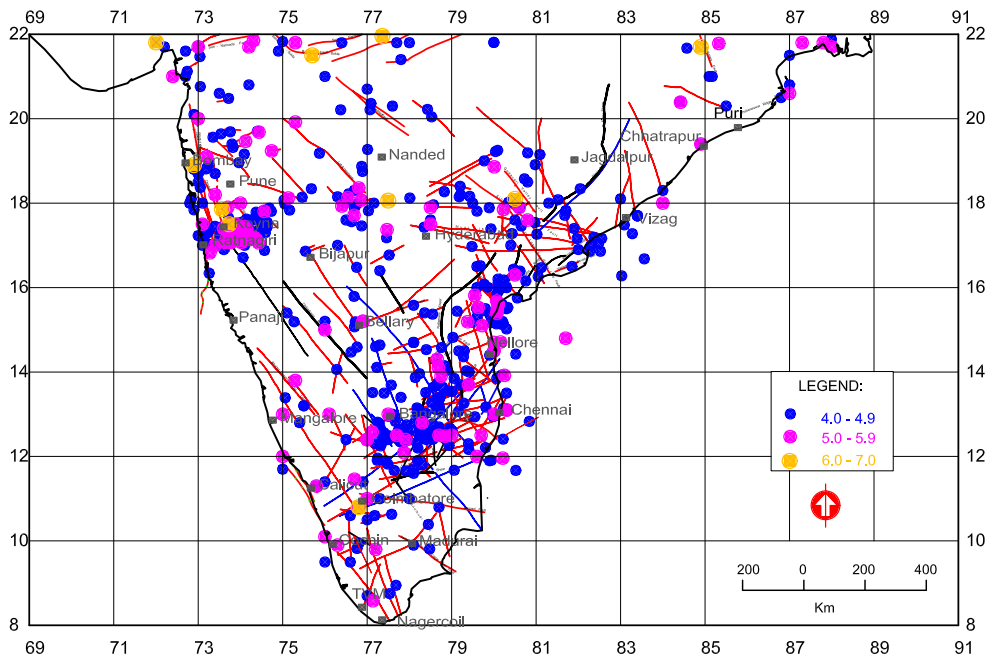


Fig. 4. Seismotectonic atlas of South India.

a specified level, z , during a specified time, T is represented by the expression:

$$P(Z > z) = 1 - e^{-\nu(z)T} \leq \nu(z)T \tag{3}$$

Where $\nu(z)$ is the mean annual rate of exceedance of ground motion parameter, Z , with respect to z . The function $\nu(z)$ incorporates the uncertainty in time, size and location of future earthquakes and uncertainty in the level of ground motion they produce at the site. It is given by:

$$\nu(z) = \sum_{n=1}^N N_n(m_0) \int_{m=m^0}^{m^u} f_n(m) \left[\int_{r=0}^{\infty} f_n(r|m) P(Z > z|m, r) dr \right] dm \tag{4}$$

Where $N_n(m_0)$ is the frequency of earthquakes on a seismic source n , having a magnitude higher than a minimum magnitude m^0 (in this study it is taken as 4.0). $f_n(m)$ is the probability density function for a minimum magnitude of m^0 and a maximum magnitude of m^u ; $f_n(r|m)$ is the conditional probability density function (probability of occurrence of an earthquake of magnitude m at a distance r from the site for a seismic source n); $P(Z > z|m, r)$ is the probability at which the ground motion parameter Z exceeds a predefined value of z , when an earthquake of magnitude m occurs at a distance of r from the site. The integral in Eq. (4) can be replaced by summation and the density functions $f_n(m)$ and $f_n(r|m)$

can be replaced by discrete mass functions. The resulting expression for $\nu(z)$ is given by:

$$\nu(z) = \sum_{n=1}^N \sum_{m_i=m^0}^{m_i=m^u} \lambda_n(m_i) \left[\sum_{r_j=r_{min}}^{r_j=r_{max}} P_n(R = r_j|m_i) P(Z > z|m_i, r_j) \right] \tag{5}$$

Where $\lambda_n(m_i)$ is the frequency of occurrence of magnitude m_i at the source n obtained by discretizing the earthquake recurrence relationship for the source n .

The magnitude recurrence model for a seismic source specifies the frequency of seismic events of various sizes per year. The seismic parameters were determined using Gutenberg-Richter (G-R) magnitude-frequency relationship which is given in Eq. (2). The maximum magnitude (m^u) for each source was estimated based on maximum reported magnitude at the source plus 0.5 (Iyengar and Ghosh, 2004; Raghu Kanth and Iyengar, 2006). The recurrence relation for each fault, capable of producing earthquake magnitudes in the range m^0 to m^u was calculated using the truncated exponential recurrence model developed by McGuire and Arabasz (1990), and it is given by the following expression:

$$N(m) = N_i(m_0) \frac{e^{-\beta(m-m_0)} - e^{-\beta(m_u-m_0)}}{1 - e^{-\beta(m^u-m_0)}} \tag{6}$$

for $m^0 \leq m < m^u$

Where $\beta = b \ln(10)$ and $N_i(m_0)$ weightage factor for a particular source based on deaggregation. Deaggregation procedure followed here is similar to the one followed by Iyengar and Ghosh (2004), Raghu Kanth and Iyengar (2006) and

Table 3. Details of the fault parameters.

Fault no.	M_{max}	Length (km)	Fault no.	M_{max}	Length (km)	Fault no.	M_{max}	Length (km)
1	5.1	231	64	4.2	84	127	6.4	35
2	4.4	249	65	4.7	125	128	4.3	24
3	4.2	160	66	4.2	262	129	5.2	57
4	4.3	113	67	5.0	219	130	4.2	143
5	4.3	107	68	5.0	125	131	5	379
6	4.4	175	69	5.0	332	132	4.3	108
7	4.5	247	70	4.8	53	133	4.3	396
8	4.3	133	71	5.0	21	134	4.3	63
9	5.1	84	72	5.0	207	135	4.5	259
10	4.6	506	73	5.0	349	136	5.7	40
11	4.9	75	74	4.9	127	137	5.2	124
12	5.3	200	75	4.8	110	138	5.8	43
13	4.3	385	76	5.0	76	139	6.7	67
14	4.8	114	77	4.7	52	140	4.3	153
15	6.3	457	78	4.1	181	141	4.3	12
16	5.7	470	79	5.4	120	142	4.3	47
17	5.0	143	80	4.2	143	143	4.2	97
18	4.7	61	81	4.2	220	144	4.4	189
19	4.2	327	82	4.3	106	145	4.5	22
20	4.5	204	83	4.9	50	146	4.5	198
21	4.3	120	84	4.7	58	147	5.2	283
22	4.3	112	85	5.4	148	148	4.3	234
23	4.3	131	86	4.8	221	149	4.2	104
24	4.3	120	87	4.3	125	150	4.6	190
25	4.6	78	88	4.4	90	151	4.3	78
26	4.4	150	89	4.7	67	152	4.8	146
27	4.8	115	90	4.7	121	153	4.9	20
28	4.4	97	91	5.0	57	154	5	47
29	5.2	176	92	5.7	57	155	4.8	85
30	4.5	95	93	4.3	49	156	5.3	26
31	4.8	592	94	4.5	63	157	4.6	167
32	5.0	347	95	4.1	83	158	4.8	45
33	5.0	166	96	4.3	127	159	4	24
34	4.8	88	97	4.4	87	160	4	47
35	5.7	283	98	5.0	62	161	4.9	180
36	5.2	146	99	4.3	120	162	4.9	39
37	5.0	118	100	4.6	184	163	4.9	211
38	4.2	95	101	4.4	78	164	5.7	31
39	5.6	100	102	4.5	64	165	4.5	21
40	5.2	286	103	4.8	74	166	4.2	119
41	5.2	109	104	4.3	96	167	4	15
42	4.8	179	105	4.3	21	168	5.6	372
43	4.8	121	106	4.4	335	169	4.7	34
44	4.9	54	107	4.9	96	170	4	29
45	4.6	123	108	4.9	27	171	4	3
46	5.6	131	109	4.6	29	172	4.7	5
47	4.4	209	110	4.1	131	173	4.6	43
48	4.8	62	111	7	220	174	6	87
49	4.0	227	112	4.3	105	175	4.5	239
50	5.4	123	113	4.4	203	176	4.8	309
51	4.5	151	114	5.1	138	177	5.3	109
52	4.5	103	115	4.8	21	178	5	27
53	5.0	49	116	4.9	129	179	6.3	173
54	4.8	434	117	6.3	59	180	5.7	351
55	5.0	107	118	5.9	50	181	5	160
56	4.8	193	119	4.2	103	182	5	241
57	4.4	178	120	5	35	183	4	531
58	4.8	154	121	4.3	161	184	4.3	198
59	4.0	146	122	4	168	185	4.3	166
60	5.0	107	123	5.2	84	186	4.6	96
61	4.9	99	124	4.2	381	187	4.1	195
62	4.1	266	125	5.1	229	188	4.2	95
63	5.7	35	126	5	36	189	5.2	83

Anbazhagan et al. (2009) for PSHA of Delhi, Mumbai and Bangalore, respectively.

$$\text{Weightingfactor} = 0.5 (\alpha_i + \chi_i) \tag{7}$$

The weighing factor for length,

$$\alpha_i = L_i / \sum L_i \tag{8}$$

L_i is the length of the fault i . The earthquake event weighting factor (χ_i) has been taken as the ratio of the past events associated with source i to the total number of events in the region as given below:

$$\chi_i = \frac{\text{Number of earthquakes close to the source}}{\text{Total number of earthquakes in the region}} \tag{9}$$

The recurrence relation of source i has been calculated by averaging both weighting factors as given below:

$$N_i(m_0) = 0.5(\alpha_i + \chi_i)N(m_0) \tag{10}$$

The value of m^0 for all the faults were taken as 4 and the value of m^u for each of the faults were calculated as explained above. The magnitude range for each fault was divided into small intervals and the recurrence rates of each of these magnitudes were calculated using the above equations.

In PSHA, the probability of occurrence of an earthquake anywhere in the fault is assumed to be the same. The uncertainty involved in the source to site distance is described by a probability density function. The shortest and longest distance from each source to the centre of the grid is calculated. The hypocentral distance was calculated by considering a focal depth of 15 km, similar to the one used for DSHA by Sitharam et al. (2006) and Sitharam and Anbazhagan (2007). A probable source zone depth of 10 km has been considered by Bhatia et al. (1997) in an exercise to develop seismic hazard map of the shield region of India in GSHAP. The conditional probability distribution function of the hypocentral distance R for an earthquake of magnitude $M=m$ is assumed to be uniformly distributed along a fault. It is given by Kireghian and Ang (1977) as:

$$P(R < r | M = m) = 0 \text{ for } R < (D^2 + L_0^2)^{1/2} \tag{11}$$

$$P(R < r | M = m) = \frac{(r^2 - D^2)^{1/2} - L_0}{L - X(m)} \text{ for } (D^2 + L_0^2) \leq R < \{D^2 + [L + L_0 - X(m)]^2\}^{1/2} \tag{12}$$

$$P(R < r | M = m) = 1 \text{ for } R > \{D^2 + [L + L_0 - X(m)]^2\}^{1/2} \tag{13}$$

Where $X(m)$ is the rupture length in kilometers, for an event of magnitude m , estimated using the Wells and Copper-smith (1994) equation, which is as given below:

$$X(m) = \min \left[10^{(-2.44 + 0.59(m_i))}, \text{ fault length} \right] \tag{14}$$

The notations used in the Eqs. (11–14) are explained in Fig. 5.

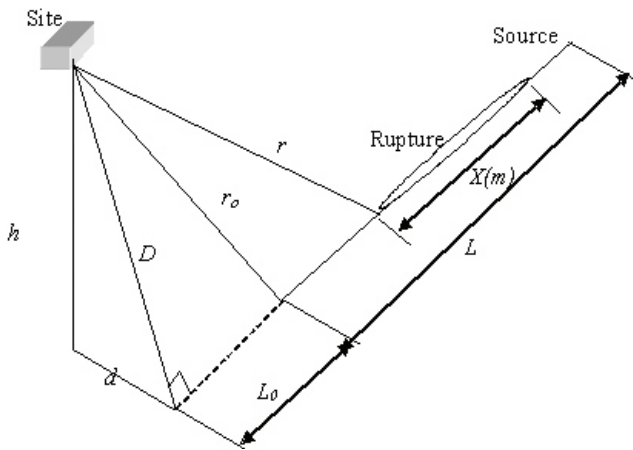


Fig. 5. Fault rupture model.

Since the study area is located in peninsular India, the attenuation relation (for peak horizontal acceleration and spectral acceleration) for the rock site in Peninsular India developed by Raghu Kanth and Iyengar (2007) was used. The attenuation relation suggested for the region is:

$$\ln y = c_1 + c_2 (M - 6) + c_3 (M - 6)^2 - \ln R - c_4 R + \ln(\epsilon) \quad (15)$$

Where y , M , R and ϵ refer to PHA/spectral acceleration (g) at the bed rock level, moment magnitude, hypocentral distance and error associated with the regression respectively. The coefficients in Eq. (15), c_1 , c_2 , c_3 , and c_4 are obtained from Raghu Kanth and Iyengar (2007). The normal cumulative distribution function has a value which is most efficiently expressed in terms of the standard normal variables (z) which can be computed for any random variables using transformation as given below (Kramer, 1996):

$$z = \frac{\ln \text{PHA} - \overline{\ln \text{PHA}}}{\sigma_{\ln \text{PHA}}} \quad (16)$$

Where PHA is the various targeted peak acceleration levels which will be exceeded. $\overline{\ln \text{PHA}}$ is the value calculated using attenuation relationship equation and $\sigma_{\ln \text{PHA}}$ is the uncertainty in the attenuation relation expressed by the standard deviation.

7 Evaluation of seismic hazard

For generating seismic hazard curves, a newly developed MATLAB program was used. The input for this program include the parameters of the faults, viz. latitude and longitude of the starting and end point of the faults, number of earthquakes along the fault, the maximum magnitude, the seismicity parameters and the grid size. The program will divide the study area into grids of specified size and the seismic hazard values at the centre of each grid cell will be calculated. The hazard curves for mean annual rate of exceedance for PHA

and Spectral acceleration for 1 s at rock level were calculated for each of the grid cells. Uniform hazard response spectrum (UHRS) at rock level with 2% and 10% probability of exceedance in 50 years were also calculated for all the grid points. UHRS with 2% and 10% probability of exceedance in 50 years for important cities in South India are shown in Figs. 6 and 7.

8 Local site effects

In the previous sections the evaluation of PHA and SA values at rock levels were discussed in detail. Due to the variations in the local site conditions, the surface level peak ground acceleration (PGA) and spectral acceleration values can be different from the rock level values. The method which is widely followed for classifying the site is the average shear wave velocity in the top 30 m, which is commonly referred to as V_s^{30} . This method has been adopted by many codes for estimating the design ground motion at a site, after incorporating the local site conditions. In the present study four site classes were considered, viz. site class A to D. The shear wave velocity ranges for each site class, as suggested by National Earthquake Hazard Reduction Program (NEHRP) (The Building Seismic Safety Council – BSSC, 2001), are site class A ($V_{30} > 1.5$ km/s), site class B ($0.76 \text{ km/s} < V_{30} \leq 1.5$ km/s), site class C ($0.36 \text{ km/s} < V_{30} \leq 0.76$ km/s) and site class D ($0.18 \text{ km/s} < V_{30} \leq 0.36$ km/s). For estimating the surface level spectral acceleration values, the equation suggested by Raghu Kanth and Iyengar (2007) for peninsular India were used.

$$\ln F_s = a_1 y_{br} + a_2 + \ln \delta_s \quad (17)$$

Where a_1 and a_2 are regression coefficients, y_{br} is the spectral acceleration at rock level and δ_s is the error term. The value of spectral acceleration for different site classes can be obtained using Eq. (18).

$$y_s = y_{br} F_s \quad (18)$$

Where y_s is the spectral acceleration at the ground surface for a given site class.

9 Results and discussions

In this study an attempt has been made to evaluate the seismic hazard based on PHA and SA at rock level and PGA at ground level, based on different site classes, for South India based on probabilistic seismic hazard analysis. Using a newly developed MATLAB program, the hazard curves and UHRS for 2% and 10% probability exceedance in 50 years are calculated for 9500 grid points in the study area. The program was validated by comparing with results obtained by Raghu Kanth and Iyengar (2006) for Mumbai. The values obtained in this study matches well with the previous

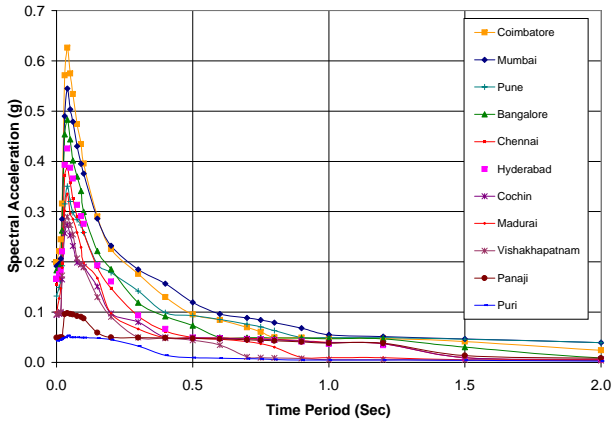


Fig. 6. UHRS at rock level with 2% probability of exceedance in 50 years for important cities in South India.

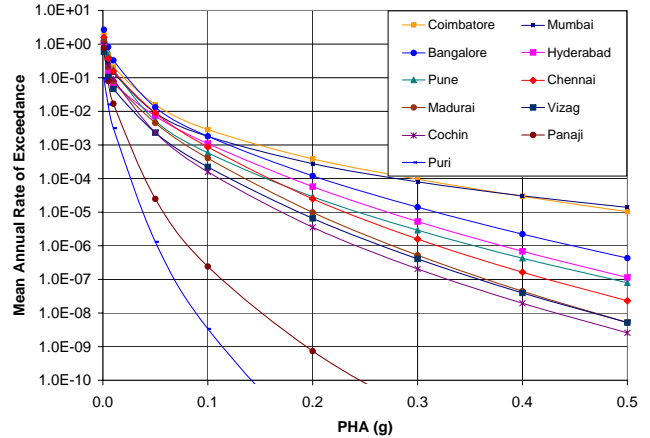


Fig. 8. PHA (g) at rock level vs. mean annual rate of exceedance curves for important cities in South India.

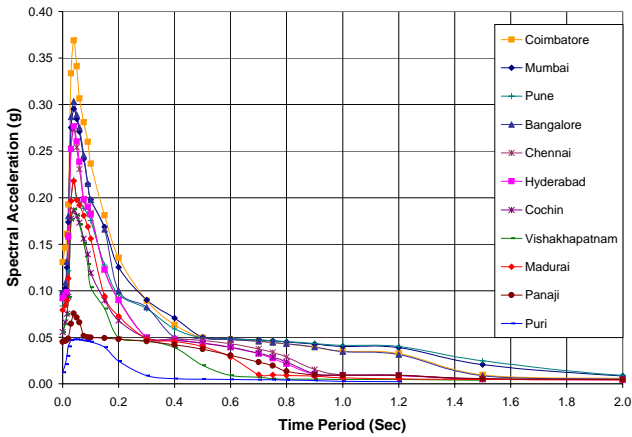


Fig. 7. UHRS at rock level with 10% probability of exceedance in 50 years for important cities in South India.

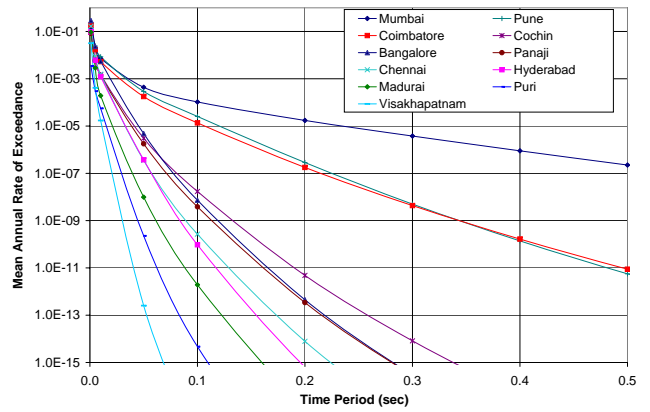


Fig. 9. Sa for 1 s at rock level vs. mean annual rate of exceedance for important cities in South India.

results. To compare the seismic hazard for important cities in South India, hazard curves for mean annual rate of exceedance versus PHA and mean annual rate of exceedance versus SA for 1 s (both at rock level) are given in Figs. 8 and 9. The rock level PHA distribution for the entire study area with 10% probability of exceedance in 50 years (return period of 475 years) is shown in Fig. 10. The maximum PHA value of 0.37 g was estimated at the Koyna region. A PHA value of 0.37 g corresponds to zone V as per the current seismic hazard map of India (BIS-1893, 2002). However, the Koyna region is placed in the seismic zone IV, where the PHA value varies for 0.16 g to 0.24 g (Fig. 11). The PHA values in the central region of South India, around Bangalore, are in the range of 0.11 g to 0.16 g. This region also shows higher seismic hazard than the code (BIS-1893, 2002) specification. The PHA value for the Bangalore region reported by Sitharam and Anbazhagan (2007) is 0.146 g, which also matches with the present study. Similar results were obtained in the studies by Jaiswal and Sinha (2007) for Koyna region

and Anbazhagan et al. (2009) for Bangalore region. The variation of spectral acceleration at 1 s for 10-percentage probability of exceedance in 50 years is shown in Fig. 12. Here also the maximum SA at rock level is obtained at Koyna region.

In the recent years the building codes are revised to consider the 2% probability of exceedance in 50 years, which corresponds to a return period of 2475 years. The seismic hazard curves for PHA at rock level for 2% probability of exceedance in 50 years is given in Fig. 13. The increase in PHA values corresponding to a decrease in the probability of exceedance is very small for most of the regions in South India. In these hazard curves also the Koyna region is having the highest PHA value of 0.66 g. The spectral acceleration at 1 s with 2% probability of exceedance for 50 years at rock level is given in Fig. 14.

Uniform hazard response spectra (UHRS) were developed for bedrock and A, B, C and D type soil classes for Mumbai and Bangalore. For both the cities the probabilities of ex-

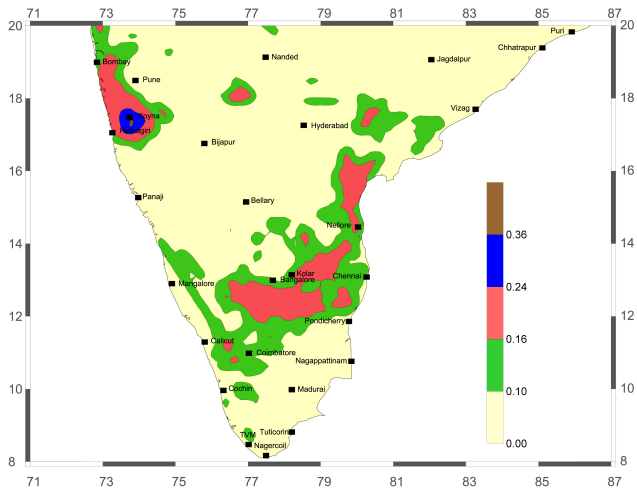


Fig. 10. Rock level PHA (g) values for 10% probability of exceedance in 50 years.

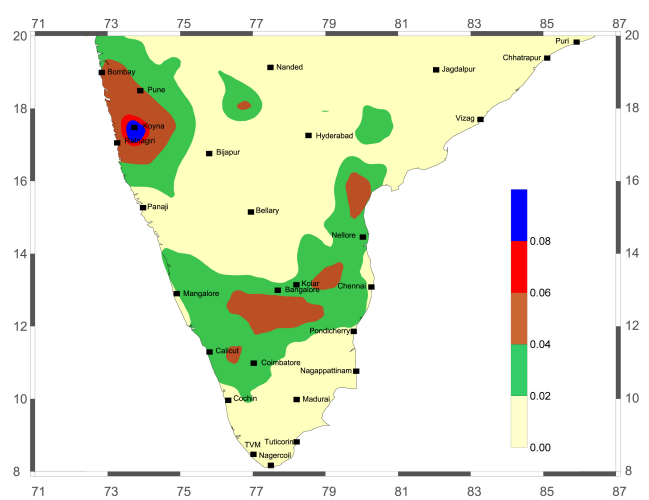


Fig. 12. Rock level Spectral Acceleration (g) at 1 s for 10% probability of exceedance in 50 years.

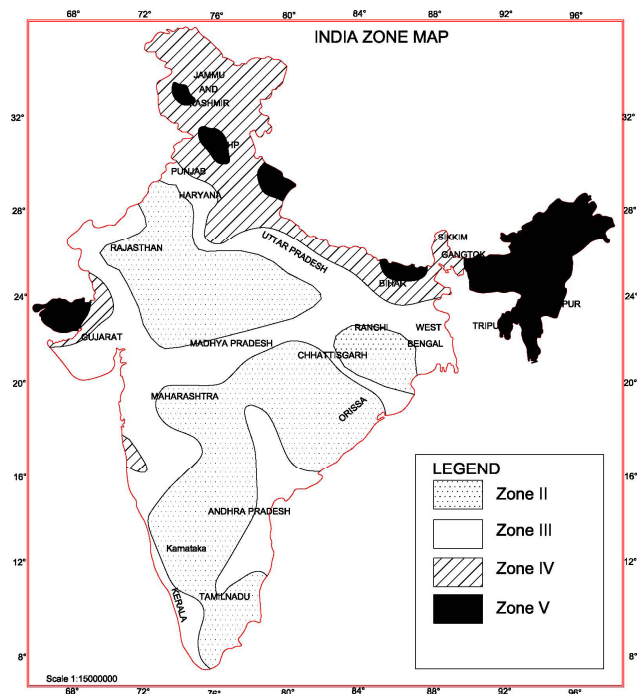


Fig. 11. Seismic Zonation map of India (BIS-1893, 2002).

ceedance considered were 2% and 10% in 50 years and the results are shown in Figs. 15 to 18. These results clearly show the variation of predominant frequency with change in soil types. For the cities of Mumbai and Bangalore, the period of oscillation corresponding to maximum SA varies from 0.05 s at bedrock level to 0.2 s at ground surface for site class D. The knowledge of soil condition is essential for determining the PGA at ground surface because the amplification of spectral acceleration values varies with site conditions. However for a large area like South India, which covers more than one million square kilometers, getting the

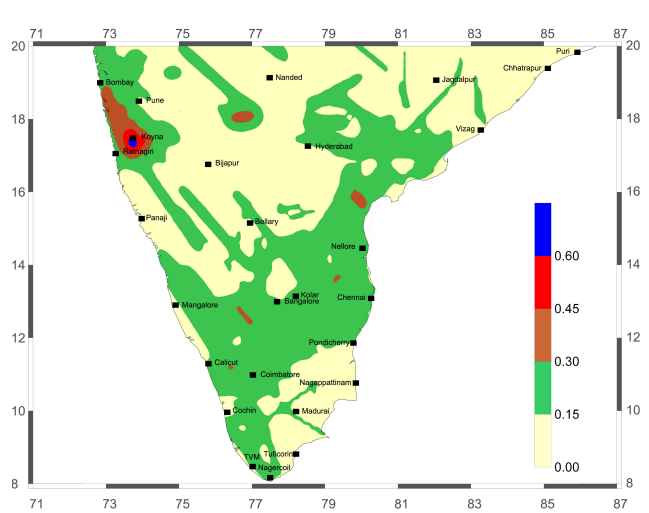


Fig. 13. Rock level PHA (g) values for 2% probability of exceedance in 50 years.

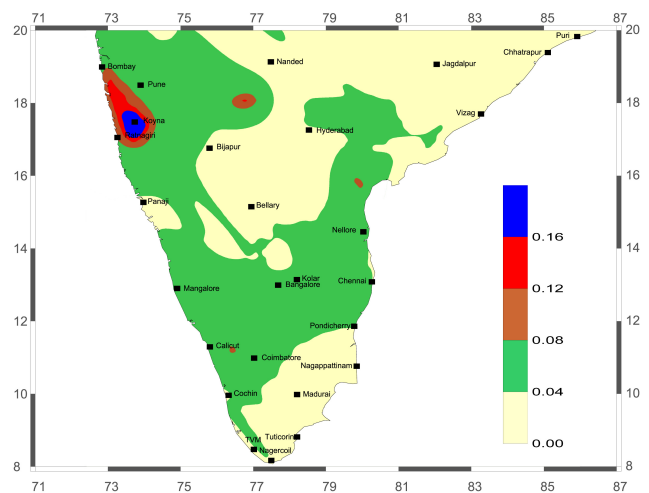


Fig. 14. Rock level Spectral Acceleration (g) at 1 s for 2% probability of exceedance in 50 years.

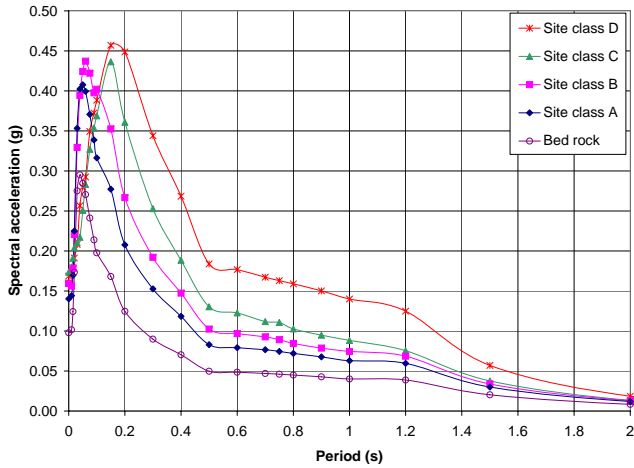


Fig. 15. Response spectra for different site conditions at Mumbai with 10% probability of exceedance in 50 years.

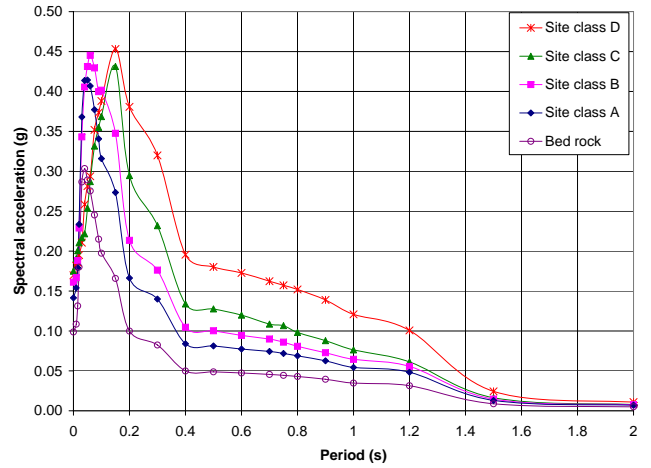


Fig. 17. Response spectra for different site conditions at Bangalore with 10% probability of exceedance in 50 years.

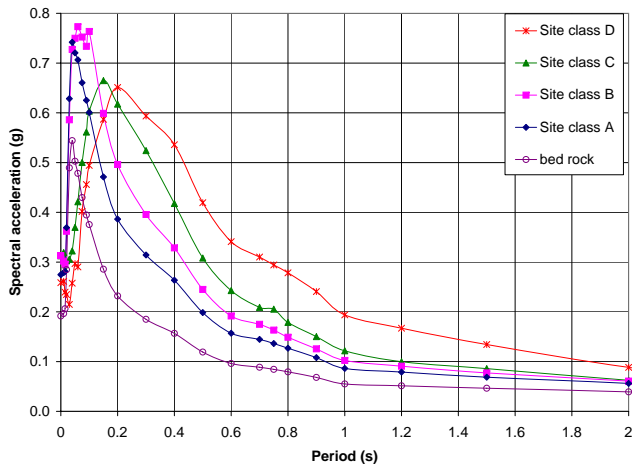


Fig. 16. Response spectra for different site conditions at Mumbai with 2% probability of exceedance in 50 years.

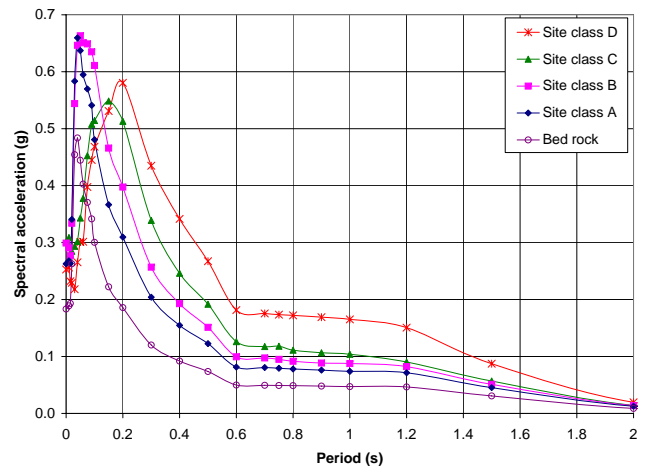


Fig. 18. Response spectra for different site conditions at Bangalore with 2% probability of exceedance in 50 years.

details of site conditions for the entire area is very difficult. Hence a simplified procedure is adapted here to obtain the PGA at ground surface at any desired location for the study area. The PGA values were evaluated for South India for 10% and 2% probability of exceedance based on the site classes A to D (Figs. 19–23). These results clearly show the effect of amplification due to overburden soil column. A geotechnical site investigation will indicate the site class (based on V_s^{30}) at the desired location. Depending on the site class to which the site belongs, viz. site class A to D, the PGA at ground surface can be obtained from the respective figures. Thus it provides a very simple and comprehensive method to obtain the PGA value for a vast area like South India.

The design response spectrum for Mumbai has been developed based on Eurocode-8 (2005) and IS code (BIS-1893,

2002) for site class D and is shown in Fig. 24. This result shows that the Eurocode method is giving higher values when compared to the IS code values. In Eurocode the soil classification is done based on V_s^{30} , whereas the IS code classification is given as dense, medium and soft soil based on SPT-N values.

Even though we have followed an entirely different methodology for the seismic hazard analysis, the pattern of variation of PHA values at rock level for a return period of 475 years obtained from this study matches well with the results obtained by Jaiswal and Sinha (2007). The slightly higher value of PHA obtained in the present study is mainly due to the regional attenuation relation used in this study (Iyengar and Raghunath, 2004), the different methodology followed in identifying seismic sources and the modified earthquake catalogue used. More over this study estimates

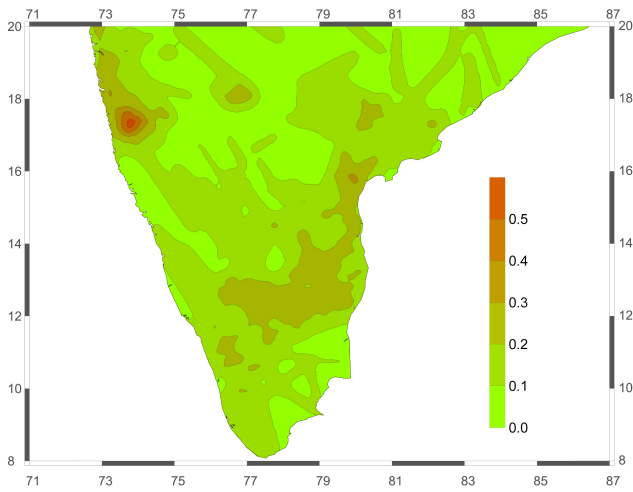


Fig. 19. Peak Ground Acceleration (g) at Surface level for site class A with 10% probability of exceedance in 50 years.

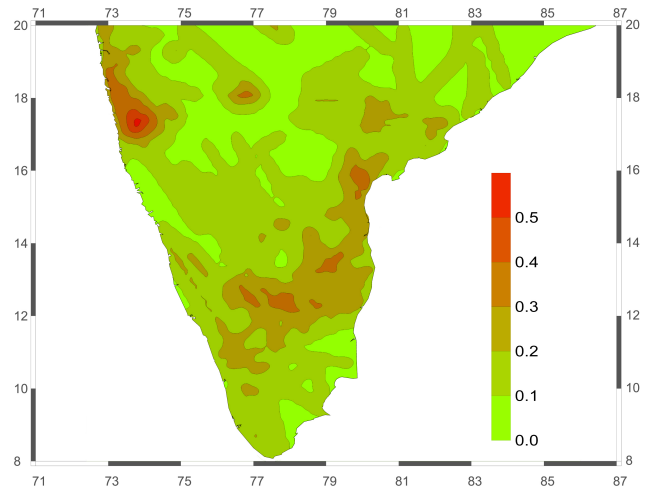


Fig. 21. Peak Ground Acceleration (g) at Surface level for site class C with 10% probability of exceedance in 50 years.

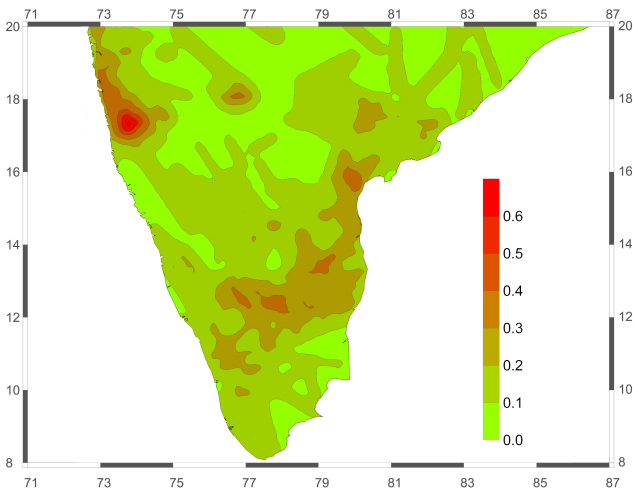


Fig. 20. Peak Ground Acceleration (g) at Surface level for site class B with 10% probability of exceedance in 50 years.

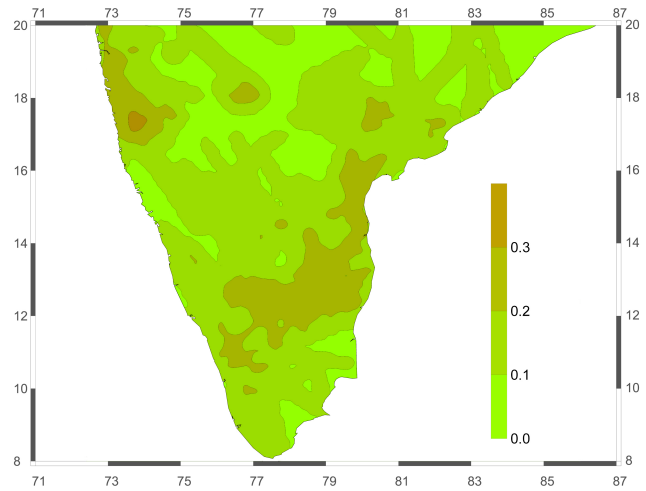


Fig. 22. Peak Ground Acceleration (g) at Surface level for site class D with 10% probability of exceedance in 50 years.

the SA for 1s and the PGA values at the ground surface level for the entire study area. Response spectrum for different site classes for Mumbai and Bangalore are also presented here.

10 Conclusions

In the present study an attempt has been made to evaluate the seismic hazard of South India using probabilistic approach. Seismic hazard was evaluated using the earthquake data obtained till December 2006 and the details of seismic sources were obtained from SEISAT-2000 and current literature. The variation of PHA as well as SA for 1 s were estimated for 2% and 10% probability of exceedance in 50 years. It is observed that the difference in PHA values and the SA values for the probability of exceedance of 2% and 10% is very less

for major portion of the study area. Further, local site effects have been considered and a simple methodology is presented to estimate ground level response spectrum for any local site based on PSHA and site class. Based on the present investigation, the following conclusions have been reached.

1. The PHA values obtained for some of the regions are much higher than what is specified in the seismic zoning map of India (BIS-1893, 2002). This indicates that more detailed study of the area is required and the seismic zoning map of IS (BIS-1893, 2002) code has to be revised.
2. The PHA, SA and UHRS values are developed by incorporating the uncertainties in magnitude, hypo central distance and attenuation of seismic waves.

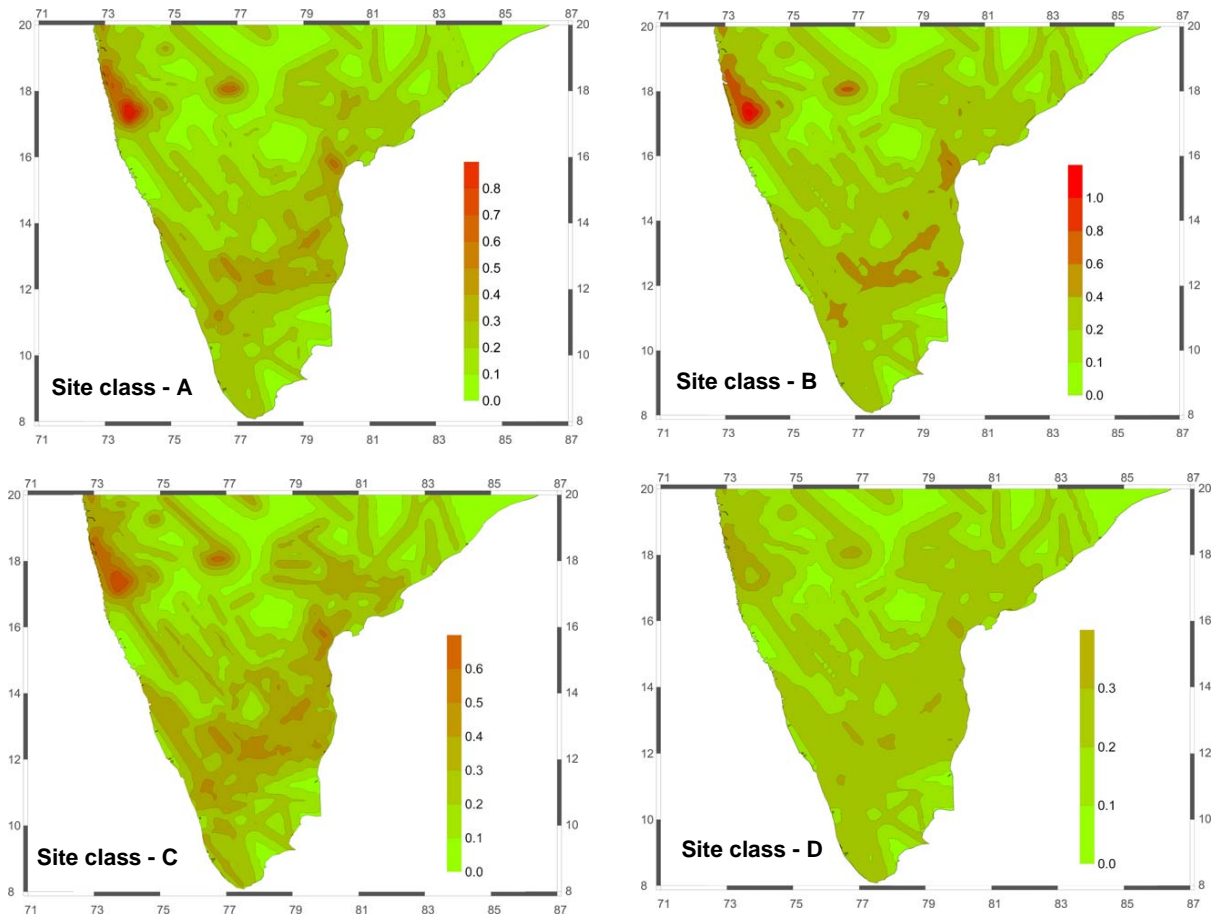


Fig. 23. Peak Ground Acceleration (g) at Surface level for different classes with 2% probability of exceedance in 50 years.

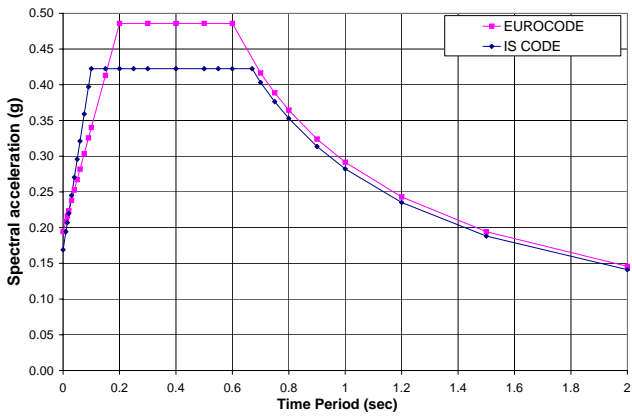


Fig. 24. Design response spectrum for Mumbai for site class D with 10% probability of exceedance in 50 years.

3. The seismotectonic map was prepared by considering all the known seismic sources which are associated with earthquakes of magnitude of 4 and above. This can be used for the microzonation studies of different parts of South India.

4. The period of oscillation for maximum spectral acceleration for the study area (at bedrock level) was found to be less than 0.1 s.
5. The UHRS for various site conditions at Mumbai and Bangalore clearly shows the variation in predominant frequency and spectral acceleration, with change in soil conditions.
6. This study considers published seismic sources from SEISAT (2000) and remote sensing studies by Ganesh Raj and Nijaganappa (2004). The identification of new seismic sources will have to be carried out using recent satellite data and this work is under progress. These new sources need to be further used for revising the hazard.
7. The PGA value for the entire South India has been evaluated for different site classes in this study. By knowing the site class at any location in the study area, the ground level PGA values can be obtained based on the simplified methodology adopted in this study.

8. Design response spectrum has been developed for Mumbai, based on site class D, using the Eurocode and IS code methods and the values are compared.

11 Data and resources

Earthquake data were collected from

http://www.earthquakeinfo.org/Catalog_Data.htm,
last accessed: May 2007,
<http://www.iris.edu/>, last accessed: May 2007,
<http://www.imd.ernet.in>, last accessed: March, 2007,
<http://www.ncedc.org>, last accessed: May, 2007,
<http://asc-india.org/>, last accessed: May 2007,
<http://www.isc.ac.uk/search/bulletin/rectang.html>,
last accessed: May 2007,
<http://earthquake.usgs.gov/regional/neic/>,
last accessed: May, 2007.

All other data used in this paper came from the published sources given in the reference.

Acknowledgements. Authors thank ISRO-IISc Space Technology Cell, Indian Institute of Science, Bangalore, India for funding the project titled “Assessment of Seismicity of Peninsular India – Using Remote Sensing and GIS”, (Ref. No. ISTC/CCE/TGS/195 dated 7 March 2007).

Edited by: M. Contadakis

Reviewed by: two anonymous referees

References

- Anbazhagan, P., Vinod, J. S., and Sitharam, T. G.: Probabilistic seismic hazard Analysis for Bangalore, *Nat. hazards*, 8, 145–166 2009.
- Basu, S. and Nigam, N. C.: Seismic risk analysis of Indian peninsula, in: *Proc. 6th World Conf. Earthqu. Engg.*, New Delhi, 1, 782–788, 1977.
- Bhatia, S. C., Ravi Kumar, M., and Gupta, H. K.: A Probabilistic Seismic Hazard Map of India and Adjoining Regions, 1–12, available at: <http://www.seismo.ethz.ch/gshap/ict/india.html>, 1997.
- BIS-1893: Indian Standard Criteria for Earthquake Resistant Design of Structures, Part 1 – General Provisions and Buildings, Bureau of Indian Standards, New Delhi, 2002.
- BSSC: NEHRP recommended provisions for seismic regulations for new buildings and other structures 2000 edition, part 1: Provisions, Report no. FEMA 368, Building seismic safety council for the federal emergency management agency, Washington, DC, USA, 2001.
- Cornell, C. A.: Engineering seismic risk analysis, *B. Seismol. Soc. Am.*, 58, 1583–1606, 1968.
- Eurocode 8.: BS-EN 1998-1, Design of structures for earthquake resistance – part 1: General rules, seismic actions and rules for buildings, European committee for standardization, Brussels, 2005.
- Ganesha Raj, K. and Nijagunappa, R.: Major Lineaments of Karnataka State and their Relation to Seismicity Remote Sensing Based Analysis, *J. Geol. Soc. India*, 63, 430–439, 2004.
- Gangrade, B. K. and Arora, S. K.: Seismicity of the Indian Peninsular Shield from Regional Earthquake Data, *Pure Appl. Geophys.*, 157, 1683–1705, 2000.
- Gosavi, P. D., Bapat, A. V., and Guha, S. K.: Maeroseismic studies of four recent Indian earthquakes, in: *Proc. World Conf. Earthquake Engg.*, 6th, New Delhi, 1, 49–54, 1977.
- Gubin, I. E.: Seismic zoning of Indian peninsula, *Bull. Intern. Inst. Seism. Earthquake Engg.*, 5, 109–139, 1968.
- Guha, S. K.: Seismic regionalization of India, 2nd Sym. *Earthquake Engg.*, Roorkee, 191–207, 1962.
- Gutenberg, B. and Richter, C. F.: Frequency of earthquakes in California, *B. Seismol. Soc. Am.*, 34 185–188, 1944.
- Heaton, T. H., Tajima, F., and Mori, A. W.: Estimating Ground motions using recorded Accelerograms, *Surv. Geophys.*, 8(1), 25–83, 1986.
- Iyengar, R. N. and Ghosh, S.: Microzonation of earthquake hazard in greater Delhi area, *Curr. Sci. India*, 87, 1193–1202, 2004.
- Iyengar, R. N. and Raghukanth, S. T. G.: Attenuation of Strong Ground Motion in Peninsular India, *Seismol. Res. Lett.*, 75(4), 530–540, 2004.
- Jade, S.: Estimates of plate velocity and crustal deformation in the Indian subcontinent using GPS geodesy, *Curr. Sci. India*, 86, 1443–1448, 2004.
- Jaiswal, K. and Sinha, R.: Probabilistic Modeling of Earthquake Hazard in Stable Continental Shield of the Indian Peninsula, *ISET Journal of earthquake technology*, 43(3), 49–64, 2006.
- Jaiswal, K. and Sinha, R.: Probabilistic seismic-hazard estimation for peninsular India, *B. Seismol. Soc. Am.*, 97(1B), 318–330, 2007.
- Kaila, K. L., Gaur, V. K., and Narain, H.: Quantitative seismicity maps of India, *B. Seismol. Soc. Am.*, 62, 1119–1131, 1972.
- Kaila, K. L. and Rao, N. M.: Seismic zoning maps of the Indian subcontinent, *Geophys. Res. Bull.*, 17, 293–301, 1979.
- Kelkar, Y. N.: Earthquakes experienced in Maharashtra during the last 300 years, *Daily Kesari Poona, Marathi*, January 7, 1968.
- Khatri, K. N., Rogers, A. M., and Algermissen, S. T.: A seismic hazard map of India and adjacent areas, *Tectonophysics*, 108, 93–134, 1984.
- Kiureghian, D. A. and Ang, A. H. S.: A fault-rupture model for seismic risk analysis, *B. Seismol. Soc. Am.*, 67(4), 1173–1194, 1977.
- Kramer, S. L.: *Geotechnical Earthquake Engineering*, Pearson Education Pvt. Ltd, Reprinted 2003, Delhi, India, 1996.
- Krishna, J.: Seismic zoning of India, in: *Earthquake Engg.*, Seminar, Roorkee University, India, 32–38, 1959.
- Kumar, P., Yuan, X., Ravi Kumar, M., Kind, R., Li, X., and Chadha, R. K.: The rapid drift of Indian tectonic plate, *Nature*, 449, 894–897, 2007.
- Mandal, P., Rastogi, B. K., and Gupta, H. K.: Recent Indian earthquakes, *Curr. Sci. India*, 79(9), 1334–1346, 2000.
- McGuire, R. K. and Arabasz, W. J.: An introduction to probabilistic seismic hazard analysis, in: *Geotechnical and Environmental Geophysics*, edited by: Ward, S. H., Society of Exploration Geophysicist, 1, 333–353, 1990.
- Milne, J.: A Catalogue of Destructive Earthquakes, A.D. 7 to A.D. 1899, British Association for the Advancement of Science,

- London, 92 pp., 1911.
- Oldham, T. A.: Catalogue of Indian earthquakes, Mem. Geol. Surv. India, 19, 163–215, 1883.
- Purnachandra Rao, N.: Single station moment tensor inversion for focal mechanisms of Indian intra-plate earthquakes, *Curr. Sci. India*, 77, 1184–1189, 1999.
- Raghu Kanth, S. T. G. and Iyengar, R. N.: Seismic hazard estimation for Mumbai city, *Curr. Sci. India*, 91(11), 1486–1494, 2006.
- Raghu Kanth, S. T. G. and Iyengar, R. N.: Estimation of Seismic Spectral Acceleration in Peninsular India, *J. Earth Sys. Sci.*, 116(3), 199–214, 2007.
- Ram, A. and Rathor, H. S.: On frequency magnitude and energy of significant Indian earthquakes, *Pure Appl. Geophys.*, 79, 26–32, 1970.
- Ramalingeswara Rao, B.: Historical Seismicity and deformation rates in the Indian Peninsular Shield, *J. Seismol.*, 4, 247–258, 2000.
- Ramalingeswara Rao, B. and Sitapathi Rao, P.: Historical Seismicity of Peninsular India, *B. Seismol. Soc. Am.*, 74, 2519–2533, 1984.
- Reddy, P. R.: Need for high-resolution deep seismic reflection studies in strategic locales of South India, *Curr. Sci. India*, 84(8), 973–974, 2003.
- Regulatory Guide 1.165: Identification and characterization of seismic sources and determination of safe shutdown earthquake ground motion, US Nuclear Regulatory Commission, 1997.
- Scordilis, E. M.: Empirical global relations converting ms and mb to moment magnitude, *J. Seismol.*, 10, 225–236, 2006.
- Seeber, L., Armbruster, J. G., and Jacob, K. H.: Probabilistic Assessment of Seismic Hazard for Maharashtra, Govt. of Maharashtra, Unpublished Report, 1999.
- SEISAT: Seismotectonic Atlas of India, Geological Survey of India, 2000.
- Sitharam, T. G. and Anbazhagan, P.: Seismic Hazard Analysis for the Bangalore Region, *Nat. Hazards*, 40, 261–278, 2007.
- Sitharam, T. G., Anbazhagan, P., and Ganesha Raj, K.: Use of remote sensing and seismotectonic parameters for seismic hazard analysis of Bangalore, *Nat. Hazards Earth Syst. Sci.*, 6, 927–939, 2006,
<http://www.nat-hazards-earth-syst-sci.net/6/927/2006/>.
- Srivastava, H. N. and Ramachandran, K.: New catalogue of earthquakes for Peninsular India during 1839–1900, *Mausam*, 36(3), 351–358, 1983.
- Stepp, J. C.: Analysis of the completeness of the earthquake sample in the Puget Sound area and its effects on statistical estimates of earthquakes hazard, in: Proc. Inter. Conf. Microzonation for safer construct, Res. Appl. Seattle, Washington, 64(4), 1189–1207, 1972.
- Tandon, A. N.: Zoning of India liable to earthquake damage, *Indian Journal of Meteorology and Geophysics*, 10, 137–146, 1956.
- Turner, H. H.: Seismological investigations XII, seismic activity, 1899–1903 inclusive, British Association for the Advancement of Science, London, 57–65, 1911.
- Valdiya, K. S.: Tectonic framework of India: A review and interpretation of recent structural and tectonic studies, *Geophys. Res. Bull.* 11, 79–114, 1973.
- Wells, D. L. and Coppersmith, K. J.: New empirical relationships among magnitude, rupture length, rupture width, rupture area, and surface displacement, *B. Seismol. Soc. Am.*, 84, 974–1002, 1994.