


Remote Sensing, GIS and DEM Applications in Flood Hydrology

Prof. D. Nagesh Kumar
 Professor, Dept. of Civil Engg.
 Associate Faculty – CEaS, DCCC
 Indian Institute of Science
 Bangalore – 560 012
 URL: <http://www.civil.iisc.ac.in/~nagesh>


1



Outline

- Floods and Potential use of Remote Sensing
- Real Time Monitoring of Floods
- GIS for Flood Damage Assessment
- Digital Elevation Models (DEMs)
- Delineation of Flood-prone Areas using Modified Topographic Index for Mahanadi Basin
- Integrated Approach to Flood Management
- Conclusions


2



Introduction

- Floods are the most common and widespread of all natural disasters
- Floods cause damage to houses, industries, public utilities and property resulting in huge economic losses, apart from loss of lives
- Though it is not possible to control the flood disaster totally, by adopting suitable structural and non-structural measures the flood damages can be minimized
- For planning any flood management measure latest, reliable, accurate and timely information is required
- Remote sensing technology has made substantial contribution in every aspect of flood disaster management such as preparedness, prevention and relief.


3



Potential uses of Remote Sensing for Flood Management

- Flood inundation mapping and monitoring
- Rapid and scientific based damage assessment
- Monitoring and mapping of flood control works
- Monitoring and mapping of changes in the river course
- Identification of river bank erosion
- Identification of chronic flood prone areas
- Inputs for flood forecasting & warning models

4




Flood Inundation Mapping

- Once a flood event occurs, information on flooded areas and quick assessment of damages is required for planning flood relief activities
- Satellite remote sensing provides synoptic view of the flood-affected areas at frequent intervals for assessing
 - Progression and recession of the flood inundation in short span of time which can be used for planning and organizing the relief operations effectively


5

IRS P6 AWiFS Image showing Various Flood Features

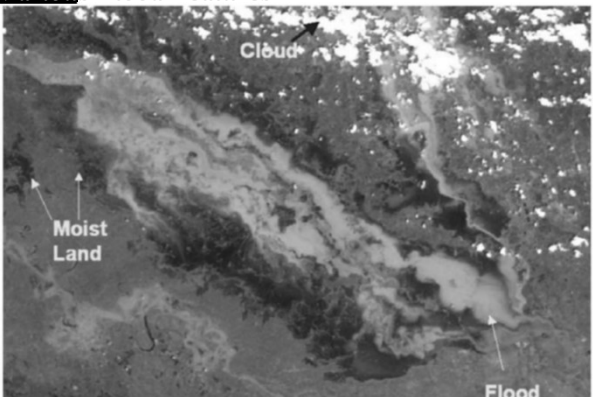


The image shows a satellite view of a river basin. A large, bright, irregularly shaped area in the upper right is labeled 'Cloud'. A dark, winding area in the center is labeled 'Moist Land'. A large, light-colored area in the lower right is labeled 'Flood'.

6

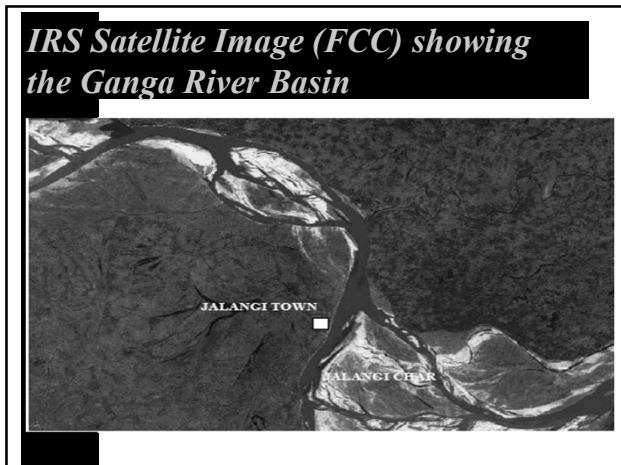

7

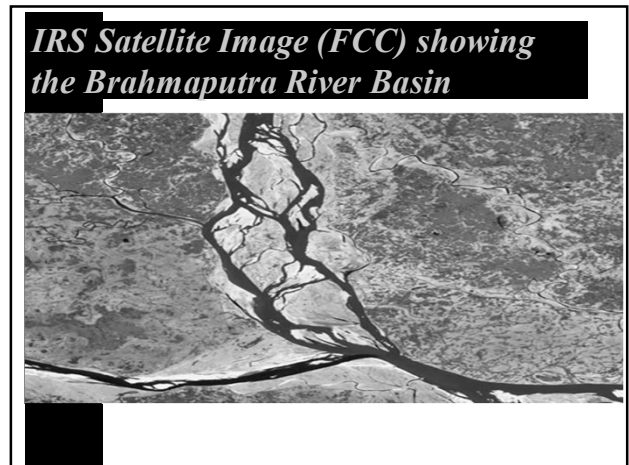

8

Satellites and their Sensors used for Flood Mapping

S.No	Satellite	Sensor/ Mode	Spatial Res(m)	Spectral Res (nm)	Swath (km)	Used For
1	IRS-P6	AWiFS	56	R2: 0.52-0.59 B2: 0.62-0.68 B4: 0.77-0.86 B5: 1.55-1.70	740	Regional level flood mapping
2	IRS-P6	LISS-III	23.5	R2: 0.52-0.59 B2: 0.62-0.68 B4: 0.77-0.86 B5: 1.55-1.70	141	District level flood mapping
3	IRS-P6	LISS-IV	5.8 at nadir	R2: 0.52-0.59 B2: 0.62-0.68 B4: 0.77-0.86	23.9	Detailed level Mapping
4	IRS-1D	WIFS	188	R3: 0.62-0.68 B4: 0.77-0.86	810	Regional level flood mapping
5	IRS-1D	LISS-III	23.5	B2: 0.52-0.59 B3: 0.62-0.68 B4: 0.77-0.86 B5: 1.55-1.70	141	Detailed level Mapping
6	Aqua/Terra	MODIS	250	36 in visible, NIR & thermal	2330	Regional level Mapping
7	IRS-P4	OCM	360	Eight narrow bands in visible & NIR	1420	Regional level Mapping
8	Cartosat-1	PAN	2.5	0.5-0.85	30	Detailed level Mapping
9	Cartosat-2	PAN	1	0.45-0.85	9.6	Detailed level Mapping
10	Radarsat-1	SAR/ ScanSAR Wide	100	C-band (5.3 cm) HH Polarization	500	Regional level mapping
11	Radarsat-1	SAR/ ScanSAR Narrow	50	C-band (5.3 cm)	300	District-level mapping
12	Radarsat-1	Standard	25	C-band	100	District-level mapping
13	Radarsat-1	Fine beam	8	C-band (5.3 cm)	50	Detailed level mapping
14	ERS	SAR	25	C-band VV Polarization	100	District-level mapping

9

Real-Time Monitoring of Floods


- Whenever a flood event occurs in India, NRSC provides flood maps showing flood affected areas and flood damage statistics in near real time
- Presently, this information is being provided to the user departments within 6 hours after procuring the satellite data
- During the last one and half decades, major flood events in Assam, Bihar, Uttar Pradesh, West Bengal, Orissa, Andhra Pradesh, Jammu & Kashmir, Rajasthan, Punjab have been successfully mapped using Indian Remote Sensing (IRS) and other satellites.

10


Microwave Remote Sensing for Flood Mapping

- In adverse cloud conditions optical data from most of the satellites will not be useful
- Microwave SAR (Synthetic Aperture Radar) data has all weather capability. Radarsat provides such data


11

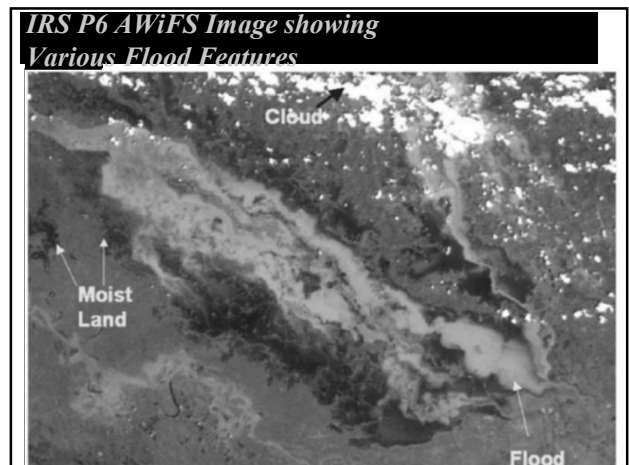


12

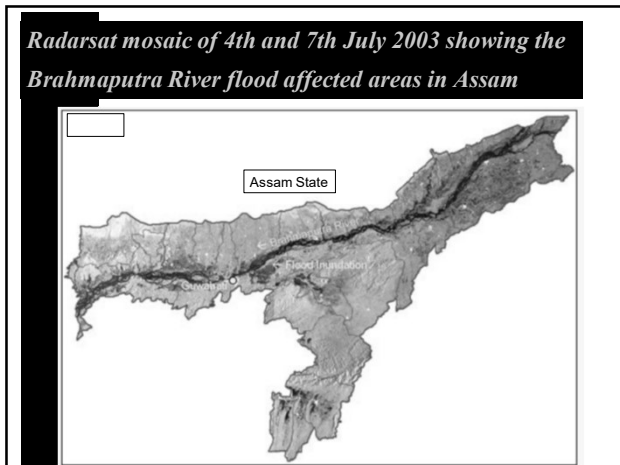


13

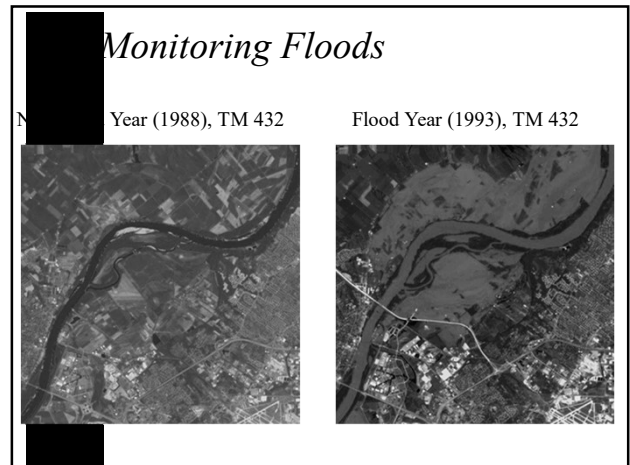


14

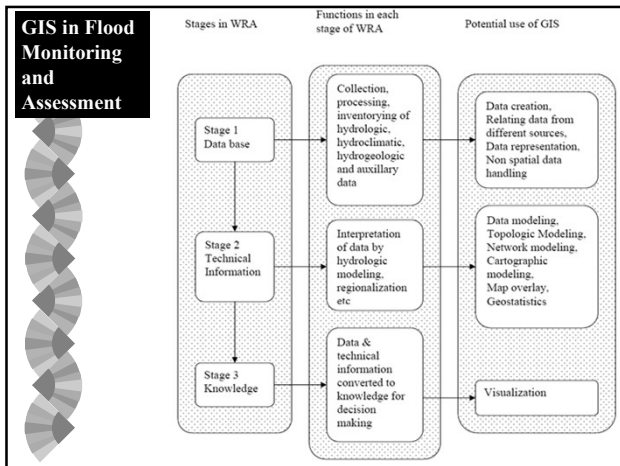


15

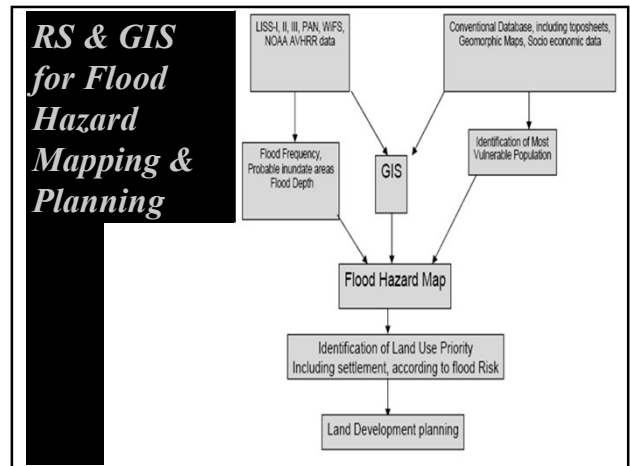

16

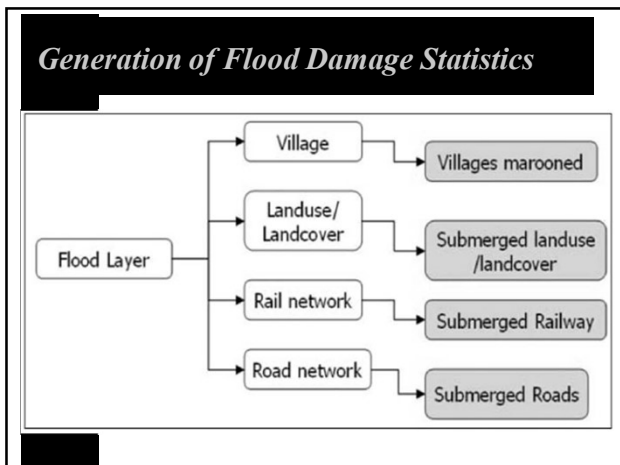

17

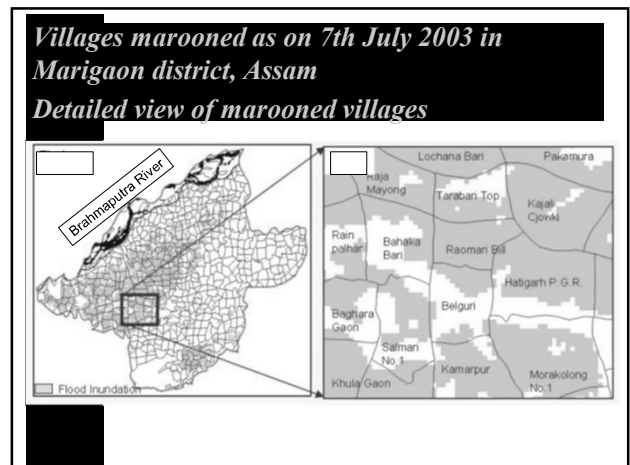


18


Utilization of Flood Images from RS & GIS

S.No	Deliverables	Utilization
1	Flood map	To map inundated areas for organizing relief operations
2	Flood damages <ul style="list-style-type: none"> Extent of inundation Crop area submerged Number of Villages marooned Length of Road/ railway network affected/submerged 	Quick assessment of flood damages, for providing relief & Rehabilitation
3	Flood control works and River configuration	Strengthening of existing & planning of future flood control works
4	River Bank erosion	Planning anti erosion works
5	Identification of chronic flood prone areas and Floodplain zoning	Hazard zonation & floodplain regulation, planning flood control works


19

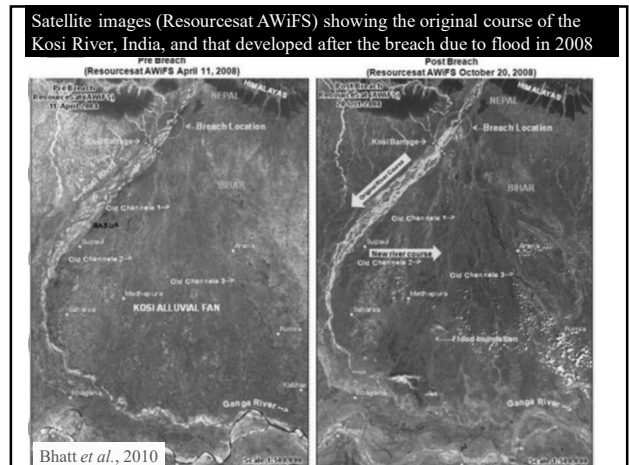


20

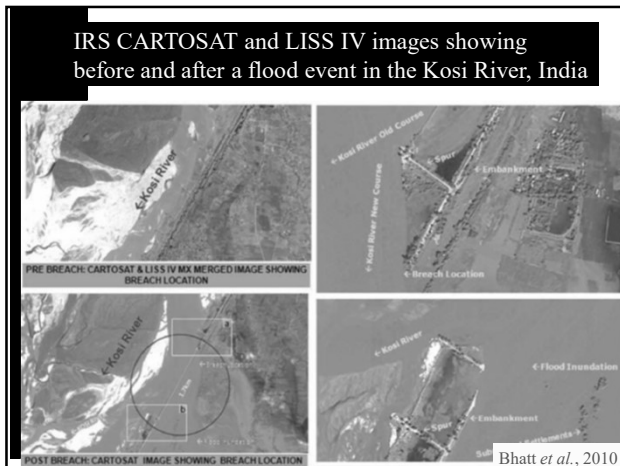


21

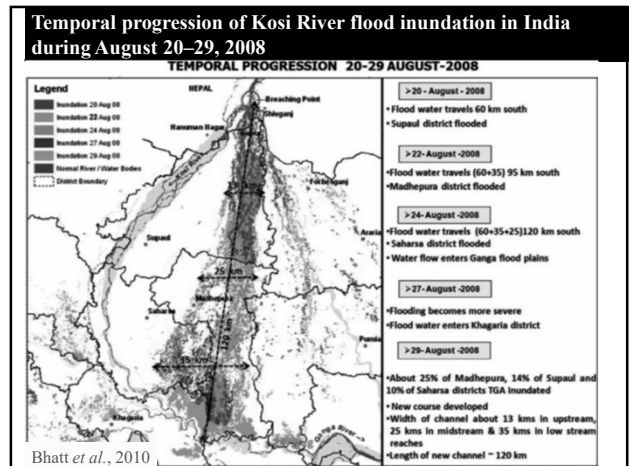


22

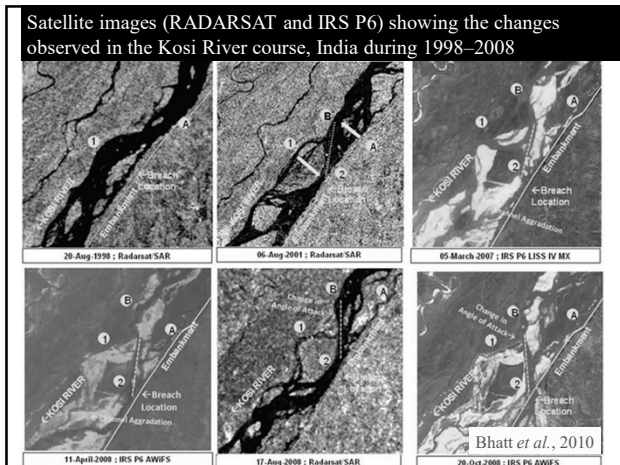


23

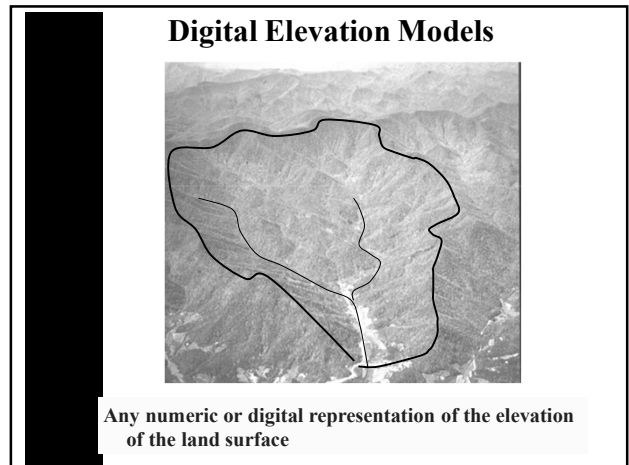


24

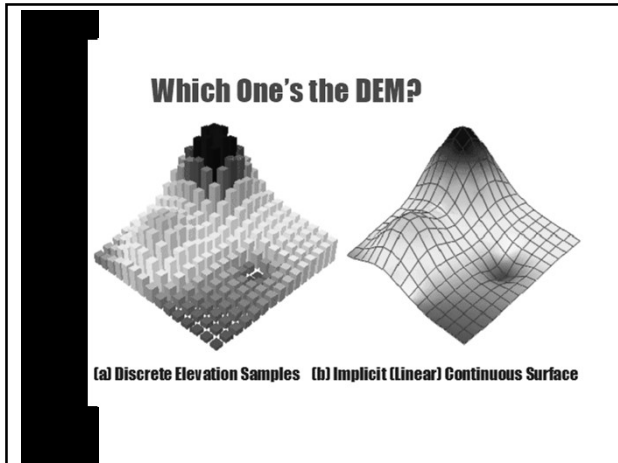


25

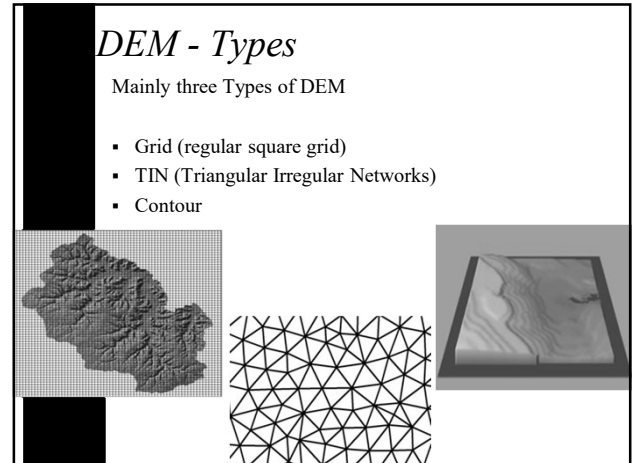


26

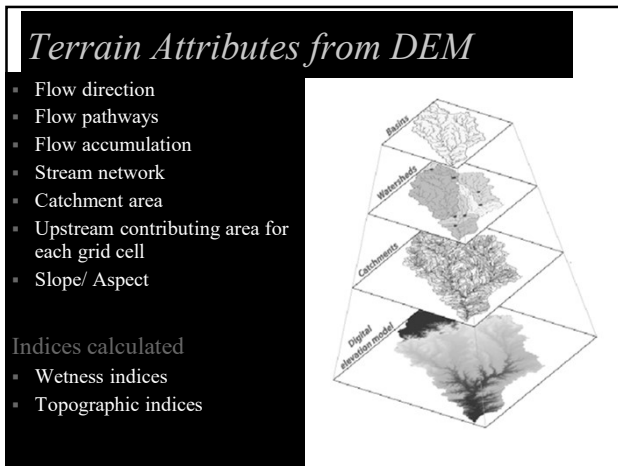


27

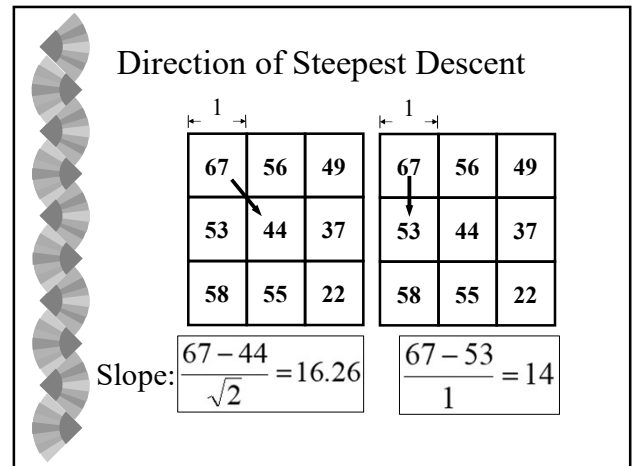


28

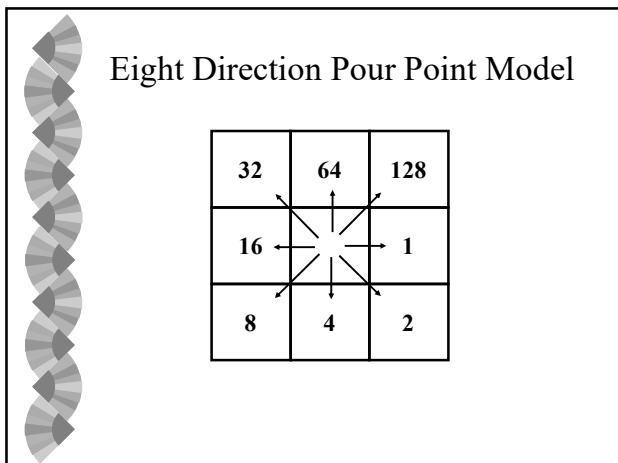


29

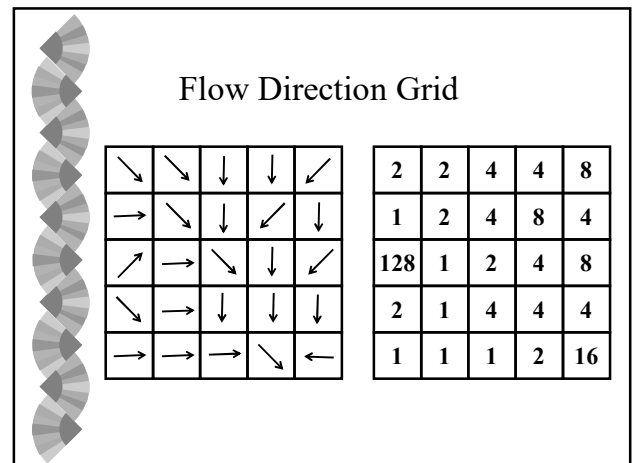


30

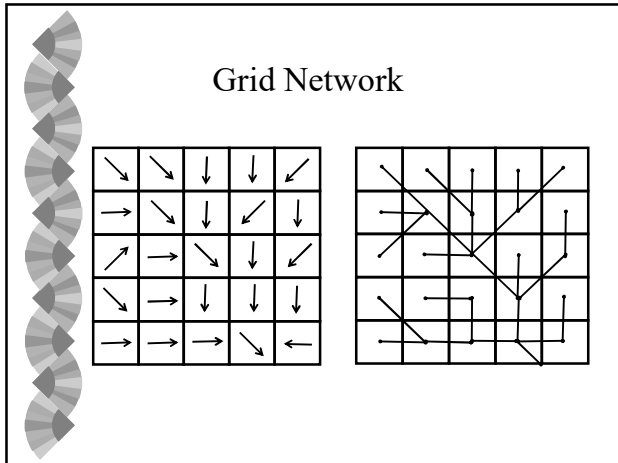


31

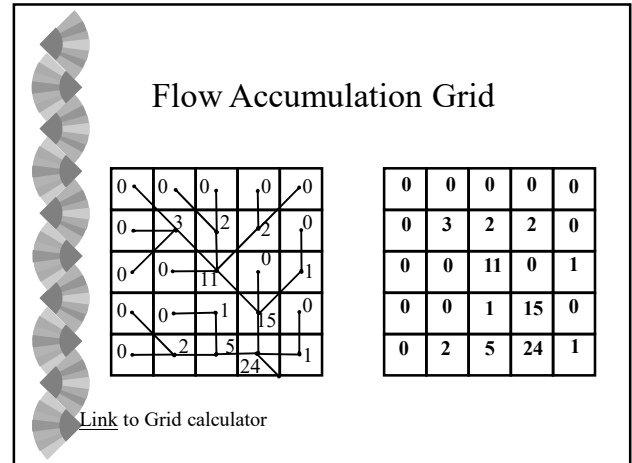


32

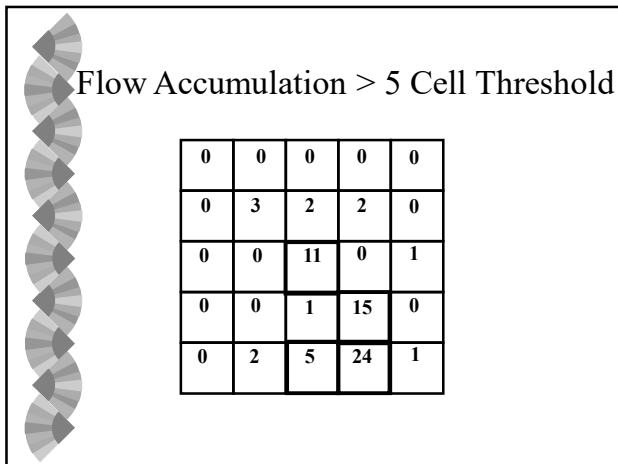


33

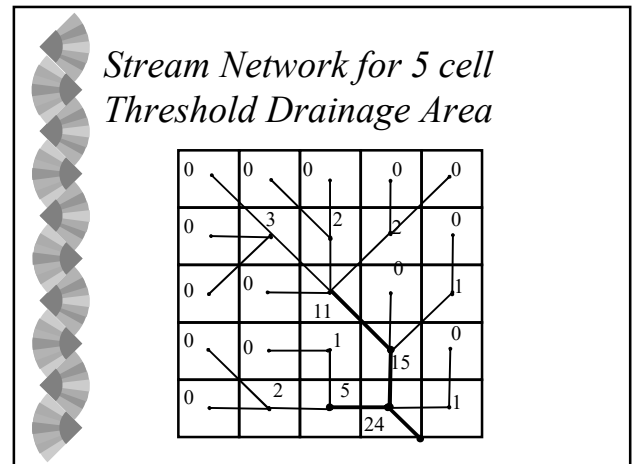

34

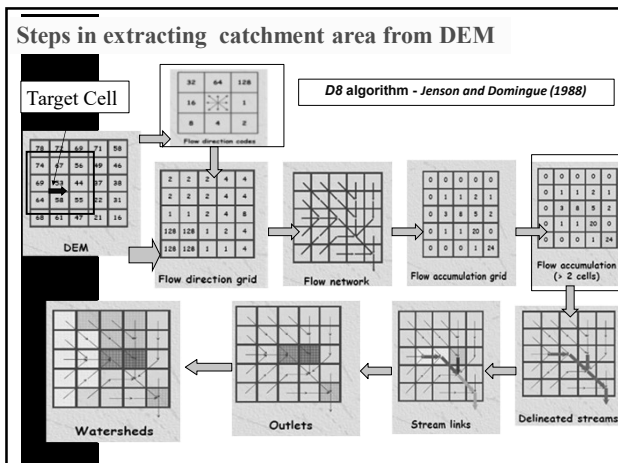

35

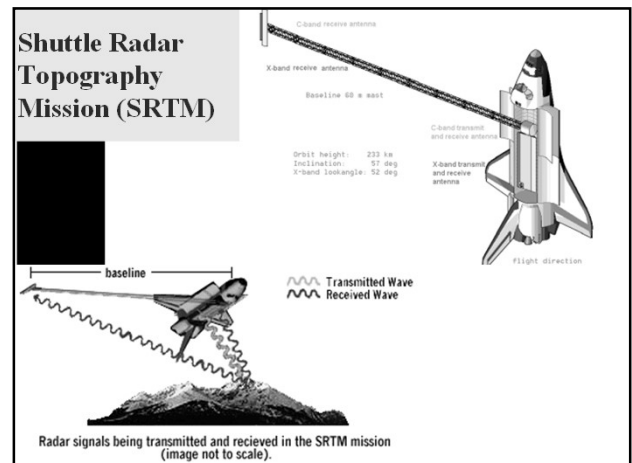

36

Shuttle Radar Topographic Mission (SRTM)

Reflected radar signals collected at two antennas, providing two sets of radar signals separated by a distance.

Radar signals being transmitted and received in the SRTM mission (maps not to scale).

- A joint international project: National Geospatial-Intelligence Agency (NGA) and National Aeronautics and Space Administration (NASA)
- SRTM consisted of a radar system that flew onboard the Space Shuttle Endeavor during an 11-day mission in February, 2000
- The original data has a resolution of 1' (approximately 30 m). The free online data has a resolution of about 90 m (3')
- It was developed through the use of "radar interferometry" technique

37

SRTM DEM 100 meter – Hillshade

38

KRISHNA BASIN

LEGEND

Source: IWMI

39

Source: IWMI

40

Delineation of Flood-prone Areas using Modified Topographic Index for Mahanadi Basin

41

Introduction

- Preparing and maintaining an accurate flood map is a difficult task.
- Ease in availability of surface elevation data has resulted in DEM based models.
- A simple method for delineation of flood-prone areas, Modified topographic index, is applied for the Mahanadi Basin

42

Topographic Index

- Topographic index (Kirkby, 1975) is defined as

$$TI = \frac{\ln a_d}{\tan \beta}$$

TI is the topographic index

a_d is the drained area per unit contour length

$\tan \beta$ is the local slope.

43

Modified Topographic Index (MTI)

- The modified topographic index (Manfreda, 2008) is given by

$$TI_m = \frac{\ln(a_d^n)}{\tan \beta}$$

TI_m is the modified topographic index

n is an exponent ≤ 1 .

44

Delineation using MTI

- It allows the delineation of the portion of the basin as exposed to flood inundation assuming that it is the area characterised by the modified topographic index exceeding a given threshold TI_{ms}
- The threshold will be estimated by using a flooding map of the basin, which is assumed to have correct representation of flooding and non-flooding areas
- Modified topographic index map is compared with flood inundation map, and value of modified topographic index above which area is considered as inundated is obtained

45

Delineation using MTI (Contd.)

- To estimate the threshold, two error functions are defined

$$ER1 = \frac{\text{Non flooding areas with } TI_m \geq TI_{ms}}{\text{Non flooding areas from flooding map}} \times 100$$

$$ER2 = \frac{\text{Flooding areas with } TI_m \leq TI_{ms}}{\text{Flooding areas from the flooding map}} \times 100$$

- $ER1$ - Percentage of non-flooded area whose value of the modified topographic index is greater than the threshold
- $ER2$ - Percentage of flooded area which has a modified topographic index value less than the threshold.

46

Delineation using MTI (Contd.)

- The objective is to define a threshold value which minimizes both errors in the delineation of the flood inundation areas.
- The sum of two errors ($ER1 + ER2$) represents an objective function that can be used for the estimation of the two parameters TI_{ms} and n .
- An iterative algorithm is used on this function to search for a minimum value of ($ER1 + ER2$), to obtain the two parameters.

47

Study Area

- The study area lies between East longitudes $80^\circ 30'$ and $86^\circ 50'$, and North latitudes $19^\circ 15'$ and $23^\circ 35'$.
- Length of the river is about 900 km, and it has a catchment area of approximately 1,41,600 km².
- Climate in the basin of Mahanadi is predominantly sub-tropical.
- Annual rainfall varies from 1143 mm to 2032 mm over the entire basin, average being 1438.1 mm.

48

43


44

45

46

47

48

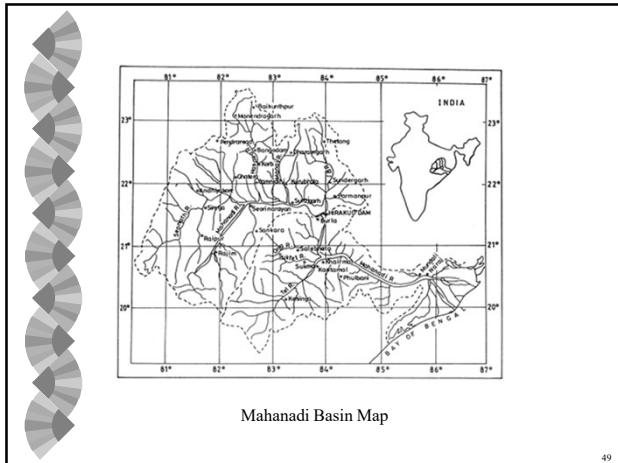


49

Data Used


- Digital Elevation Models (DEMs)

DEM	Spatial Resolution (m)
ASTER Global DEM	30
SRTM	92
GMTED2010	228
	455
	911
- Flood inundation maps for three flood events (2006, 2008 and 2011) were used.
- Annual maximum discharge data at Naraj for a period of 38 years was used for flood frequency analysis

50

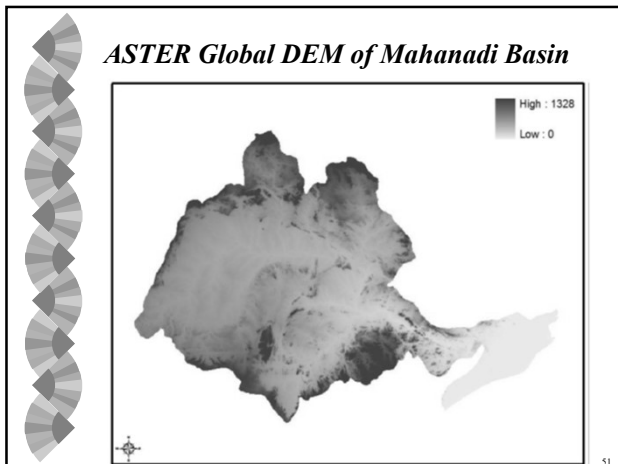

51

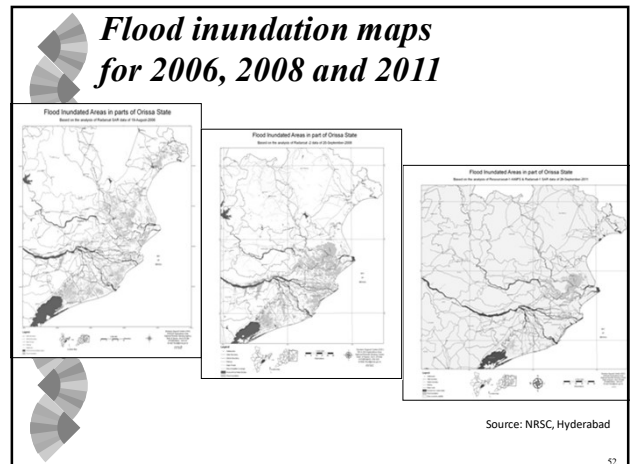


52

Methodology

- GIS analysis was performed on the DEMs to obtain the specific catchment area maps and slope maps.
- Analysis was also performed on the flood inundation maps obtained from NRSC.
- ArcMap, ERDAS Imagine and MapWindow GIS were used to perform all the operations.
- Iterations are carried out for each value of the exponent to obtain modified topographic index.
- It is compared with the flood inundation map to obtain ' n ' and ' TI_{ms} ' having the minimum error.

53

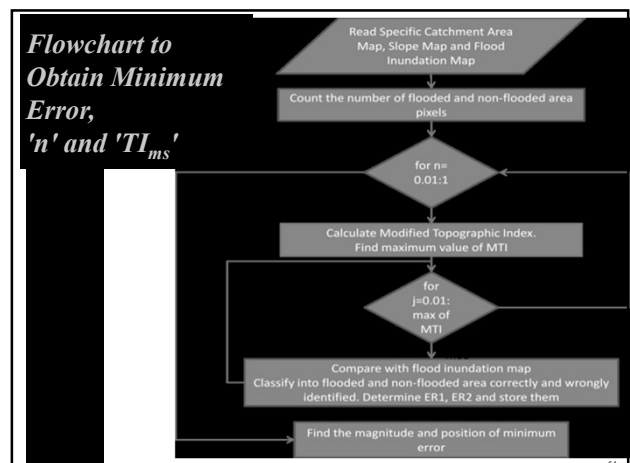

54

Methodology (Contd.)

- 'n' and 'TI_{ms}' obtained are used to produce flood inundation maps.
- Flood frequency analysis is performed by fitting the annual maximum flow data to three probability distributions: normal, log-normal and Gumbel distributions.
- Tests for goodness of fit were performed by using the χ^2 test and the Kolmogorov-Smirnoff test.

55

Results

Parameters Obtained from the Method and the Errors Corresponding to the Parameters for the Three Flood Events

Event (Year)	2006	2011	2008
Magnitude (1000 cumecs)	(36.33)	(38.71)	(44.76)
DEM Resolution (m)	<i>n</i>		
900	0.01	0.01	0.01
450	0.04	0.01	0.01
225	0.04	0.01	0.01
90	0.03	0.01	0.01
30	0.01	0.01	0.01
DEM Resolution (m)	<i>TI_{ms}</i>		
900	6.13	5.49	5.27
450	6.24	5.21	5.08
225	5.61	4.78	4.09
90	5.28	4.38	4.32
30	3.22	3.22	2.87
DEM Resolution (m)	<i>ER1 + ER2</i>		
900	43.63	37.23	38.70
450	42.63	43.09	39.88
225	39.96	43.97	21.84
90	32.42	37.98	35.51
30	17.40	18.51	18.39


56

Results (Contd.)

- The error reduces as the spatial resolution of the DEM reduces.
- It was also noted that ER1 (the over-estimation) was significantly larger than ER2 in all the cases.
- As the flood magnitude increases, TI_{ms} has reduced, indicating that a larger area will be under flood inundation.

57

Flood Inundation Map for the 2006 Flood Event from SRTM DEM (90 m)

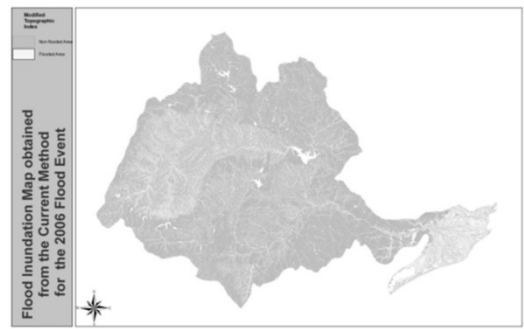

58

Flood Inundation Map for the 2008 Flood Event from SRTM DEM (90 m)



59


Flood Inundation Map for the 2011 Flood Event from SRTM DEM (90 m)



60



61

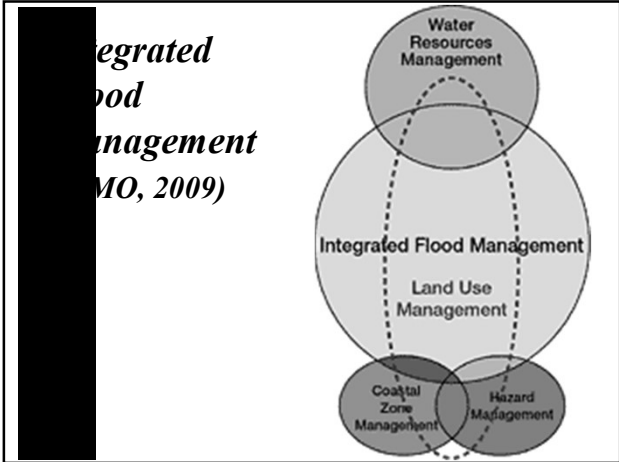

62

Integrated Flood Management Plan


- Manage the water cycle as a whole
- Integrate land and water management
- Manage risk and uncertainty
- Adopt a best mix of strategies
- Ensure a participatory approach and
- Adopt integrated hazard management approaches.

63

Strategies and Options for Flood Management
(MO, 2009)

Strategy	Options
Reducing Flooding	Dams and reservoirs
	Dikes, levees and flood embankments
	High flow diversions
	Catchment management Channel improvements
Reducing Susceptibility to Damage	Floodplain regulation
	Development and redevelopment policies
	Design and location of facilities
	Housing and building codes Flood proofing Flood forecasting and warning
Mitigating the Impacts of Flooding	Information and education
	Disaster preparedness Post-flood recovery
	Flood insurance
Preserving the Natural Resources of Flood Plains	Floodplain zoning and regulation

64

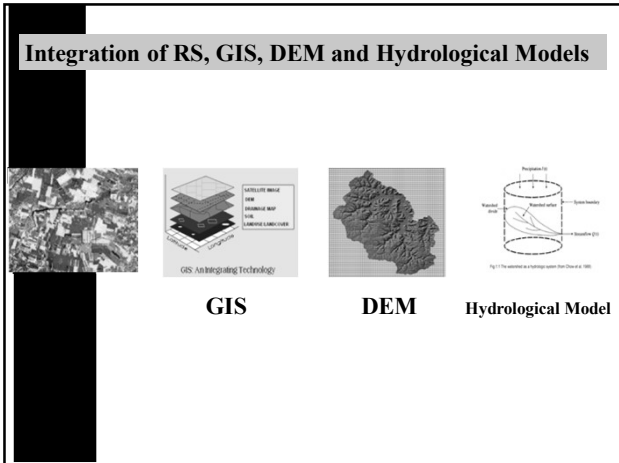

65

Conclusions

Strong potential for use of RS, GIS and DEM for Flood Hazard planning, mitigation and management

Proper image processing of remotely sensed data, DEM and spatio-temporal analyses with GIS would be very effective for Flood management

66



Thank you



67

References

<http://www.nrsc.gov.in/flood1.html>

Manumurthy, V, Manjusree, P, Srinivasa Rao, G, (2010), *Flood Disaster Management*, Chapter 12 In *Remote Sensing Applications*, Eds. PS Roy, RS Dwivedi and D Vijayan, National Remote Sensing Center, Hyderabad.

WMO (2009), *Integrated Flood Management – Concept Paper*, WMO No. 1047, Associated Programme on Flood Management (APFM), World Meteorological Organization (WMO), Geneva, Switzerland.

Manfreda, S., Sole, A., and Leo, M D. "Detection of flood prone areas using digital elevation models". *Journal of Hydrologic Engineering*, ASCE, 16(10), 781-790, 2011

Lang, W., and Montgomery, D. R. "Digital elevation model grid size, landscape representation, and hydrologic simulations." *Water Resources Research*, 30(4), 1019–1028, 1994.

68